


SINCLAIR

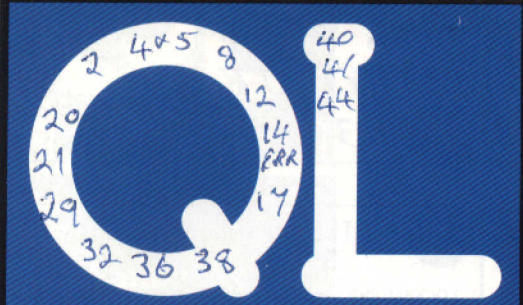

WORLD

NOVEMBER 1992 £1.95


LONELY JOKER PUTTING HIS CARDS ON THE TABLE

**TRANS 24:
BRYAN DAVIES
PINS IT DOWN!**

**WHERE HAS YOUR
MEMORY GONE?
DIY TOOLKIT**

**OMION
MONITOR &
DEBUGGER**

ISSN 0951-9335



9 770951 933016

Editor

Helen Armstrong

Publisher

Mark Kasprowicz

Advertising Manager

Jim Peskett

Creative Director

John Stanley

Graphic Artist

Stevie Billington

Magazine Services

Linda Miller, Frances
 Maxwell,
 Pauline Wakeling

**Sinclair QL World,
 Published by Arcwind
 Ltd.**

**The Blue Barn,
 Tew Lane, Wootton,
 Woodstock,
 Oxon. OX7 1HA
 Tel: 0993 811181
 Fax: 0993 811481
 ISSN 026806X**

If you have any comments or difficulties please write to the editor and we will do our best to deal with your problem in the magazine, though we cannot guarantee individual replies.

Back issues are available from the publisher price £2.50 UK, £2.99 Europe. Overseas rates on request.

Subscriptions from: Arcwind
 The Blue Barn, Tew Lane,
 Wootton, Woodstock, Oxon.
 OX7 1HA
 UK: £23.40
 Europe: £32.90
 Rest of World: £40.90

Reprographic Services: The
 Wace Group, London.
 Distributed by: Seymour
 Press Ltd.,
 Windsor House, 1270
 London Road, Norbury,
 London, SW16 4DH

1992 ARCWIND LTD.
 Sinclair QL World is
 published 12 times a year. All
 rights reserved.
 Reproduction in whole or in
 part without written
 permission is strictly
 prohibited. We welcome
 contributions, all material
 must be supplied with a
 S.A.E.

November 1992

Contents

6 TROUBLESHOOTER

Bryan Davies tests some mysterious founts and deconstructs the QL clock.

9 QL SCENE

Public domain ... Software 87 abd DJC take on German and Watford agencies ... Quanta meetings ... Spain group

10 OPEN CHANNEL

A Z88 spurns its user ... no quick route to Macs ... array storage puzzle ... calling from Africa ... more Abacus ... Editor's Notebook

12 TRANS24

Trans24 gets 24-pin action out of programs that only have 9-pin drivers. Bryan Davies pins it down.

14 QL SCENE

Miracle tour dates ... Quanta in Ashstead ... USA news ... Archive erratum ... What happened to October?

15 A QUESTION OF DOTS - part 4

Desktop publishing - Geoff Wicks adjusts his clipart clock and tells the story of the Logo that Never Was.

21 and 27 THE NEW USER GUIDE - part 20

Section Twenty follows on alphabetically from August's INPUT to LRUN, with this month's MERGE to QJOB.

25 READER SURVEY

The 1992 QL World Reader Questionnaire - return it and win a year's subscription.

29 PSION SOLUTIONS

Howard Clase presents the second part of his easy-life with Psion suggestions, including importing other machine's files into Quill.

32 DIY TOOLKIT

Where has all your memory gone? MAP can show you round the memory-state of a busy QL. With Simon Goodwin.

36 REVIEW - QMON 2

Tony Tebby's QMon monitor and debugger has been updated and remarketed. Rich Mellor tries it out.

38 REVIEW - SYSTEM2

An accessory disk- and display-handling package for Toolkit 2, at the mercy of Rich Mellor.

40 PRINTER REPORT

Old but still working hard - Alex Munden's Panasonic KX-P1080.

41 PERFECT PARAGRAPHS AND SHINING CHARACTERS - part 2

Martin Harris moves on to tracking the print-style status, toggles and printer hierarchies.

46 THE LONELY JOKER

When you're alone, entertainment's on the cards. Henry Orlowski stays in.

47 MICRO ADS

Coming Soon

Competition - 60 disks of public domain software to win. Get your pens out!

The version of *Lightning Special Edition* which is currently being shipped has some detail improvements over earlier versions. The changes are not likely to be noticed on basic (8-bit) QLs, but will be evident on systems with the Gold Card, Thor XVLs, and Ataris with the QL emulator (16- or 32-bit systems).

Transfer Utility Special Edition has had several changes made to it over the past months and now handles hard disk sub-directories and long file names. A comprehensive set of sorting and naming functions are provided. These latter functions make the program interesting to use even if you don't really need it.

Jochen Merz has produced a version of the Atari QL emulator to run on the Mega STE model, when plugged-into the VME bus. It will work on the other ST models also, with the aid of a converter. There is 256 KB of video memory and a 1000 x 1000-pixels screen can be handled - with any monitor, apparently. This allows the display of two pages side-by-side when using *text87* (which is said to be fully functional with the new emulator). This version of the emulator should work with the Atari TT (68030 chip, 32 MHz, 32-bit) too. My knowledge of the Atari models is sketchy, so interested readers should ask Jochen for full details. Performance is clearly going to be very brisk, and the display mode looks to be a big improvement on what we have available to us on the QL.

Software87 have a close working relationship with Jochen Merz and will be selling some of his software in future (QDesign, for example). They will also be selling QPac.

Founts demo

There was only one microdrive cartridge in my QL "in" pile, and past experience leads me to expect trouble on the odd occasions a cartridge is inserted into my system, but this one had been waiting in line for attention for a year. The note attached to it said it was a scaled-founts demonstration, lasting one hour, and that sounded interesting. What was on the cartridge was indeed very interesting but, with the absence of the Microdrive Exchange, there is no obvious way to share it with readers. It was a demonstration of founts in various sizes, but scaled, as the note said.

Software updates, mysterious founts and clock comments from Bryan Davies.

That is, the character shapes were displayed at gradually-increasing sizes, something I can't recollect seeing on the QL before. In addition, there was a demonstration of characters displayed on the screen in simulated 3D fashion; an example is shown in the illustration here, of a globe with *QL World* and other text written on its surface.

Using a Gold Card, with the files transferred to disk, the whole demonstration took appreciably less time than the hour quoted. Thanks to Stephen Poole of Le Bourg in France for a very well thought-out and constructed demonstration.

Mention of putting text in columns using *Text87 Plus-4* sparked off a reminder that it has been possible to create text columns in Digital Precision's *The Editor* for several years. The process is not exactly intuitive, but it is fairly straightforward once you have tried it and grasped the

file should have a bar above it, being the character created in The Editor by keying Ctrl-L. Unfortunately, I can't think of a way of putting it here that will stop it getting lost in the print process! The screen dump given here from The Editor shows some text after it has been "treated" with the command file. For assistance, the text for the commands is shown at the bottom (the L-bar character appears there); all that needs to be done to create the command file is mark the block containing the command text and save it as a `_CMD` file (then use Block Delete to get rid of it from the text). Type your basic text, correct any errors and do any other editing that is necessary, then run the command file by keying:

```
F3
RC.FLP1_COMMAND_CMD
ENTER
```

using whatever drive and file



principle. For anyone who still hasn't tried it, here is a typical command file for creating two columns:

```
T BTK SR32 JR
RP PR
T
RP (SM; 66N; BS; 65N;
31CR; BE; CM; 36CR; BM;
66N; EC.L; N; 65D)
```

Before going into the construction of this command file, mention needs to be made of a "translation" problem - the "L" shown near the end of the last line of the

name is appropriate. The command line at the bottom of the Editor window shows this command inserted ready for the Enter key to be pressed. If the commands aren't basically clear to you, a few minutes with the instruction manual are indicated. The first line puts the cursor at the top, sets the block type to Column, then sets the width of the columns and the justification type. Left-plus-right justification is the most suitable form when columns are narrow. The second line causes the column width and justification

settings from the previous line to be put into effect. The third line merely puts the cursor back at the top, ready for the real action to start.

The final line is a set of repeated commands; the 66 and 65 figures are derived from an assumed page length of 66 lines, and you should insert your own values if a different length is used. The 36 is the column width of 32, plus a gap between columns of 4; again, set whatever is appropriate to your text format. Coming to the L-bar character, the command here is to insert that character - which is the code for end of page - after each block of 66 double-column lines has been created.

Disk stuff

It could be argued that floppy disks are, by now, becoming close to obsolete. Developments in other forms of mass storage are trying to put the floppy in the shade, but there can be only a very small proportion of micros which sell without at least one floppy drive fitted, and that situation doesn't appear set to change in the near future. Removable hard disk drives are expensive and not common. Compact disks are expensive, as are the drives for them, and they suffer from a variety of not-quite-compatible formats; they are anyway not geared to the transmission of small, single programs, being aimed more at large databases. There is a definite trend towards supplying software for program developers on CD, though.

The wonders of credit-card storage are with us, but at a price few will want to pay. A special interface port (PCMCIA) is required, of a type that is only beginning to appear, and only on a few portable computers. Despite the (limited) availability for some years of floppy drives giving up to 20-30 MB per disk, even the straightforward 2.88 MB type is only now starting to appear in the mass market, and it may be too late for it to become a standard in the way that its predecessors have. The 4 MB floppy, which

was said to be following the 2.88 one closely, doesn't seem to rate a mention in the popular computer press these days.

On my QL, the absence of the hard disk drive hasn't really worried me, and the ten ED disks which Miracle supply with dual ED drives have so far proved quite enough for my needs. If you haven't used the Miracle 3.2 MB drives on the QL, you can't fully appreciate what a difference the extra capacity makes to your daily operations.

Clock quirk

Try this one, courtesy of Freddy Vachha of Digital Precision. Type-in the following SuperBasic lines, then RUN the routine, and see if you can make sense of the output on the screen:

```
100 FOR Z=1970 TO 2070
STEP 10
110 SDATE Z,1,1,1,1,1
120 PRINT
DATE$,DATE$(DATE),DATE
130 END FOR Z
```

Presumably, the QL clock was not designed to expect dates beyond about 2029, although that doesn't appear to be stated in the *QL User Guide*. Does everyone know about the odd behaviour for later dates? (Not that most of us will be too interested in them!) If that one doesn't appeal to you, try figuring out why the two PAUSE commands had to be inserted into the following line for JM QLs only - to get Perfection's Backup routine to work properly on that version:

```
19 PRINT"BACKUP"
:OPEN_NEW#4,dev2$&"BACK
UP":PAUSE 33:PRINT#4,'1
device$=""; dev3$:"":PAUSE
33:LIST#4,2 TO 24: CLOSE#4:
DELETE dev2$&"BOOT"
```

This comment is directed

1992 Sep 23 07:53:21

caps off / memory = 1465856

maybe, if only the 'surplus' part of the document got transferred, but the whole lot goes onto a def.tmp file on mdv2. This means that there is frequent movement of mdv2 as you carry on typing. You will normally be saving the document onto mdv2, and it follows that the document size now cannot be greater than about half the cartridge space - possibly 55k. This is equivalent to roughly 5,000 words (the number of words Typo00 get varies with document layout, word length etc, and

fast enough in operation to avoid major irritation. On the other hand, if you make plenty of use of the cursor keys, or Copy and Erase a lot, frustration will be the order of the day. Quill is set up to reformat the screen text frequently when the cursor is moved, and "re-painting" the screen is not a fast business on the QL. There are three programs currently available which improve the situation - Turbo00 Quill, Lightning and SpeedScreen. The first is for

T BTK SR32 JR

RP PR

T

RP (3M; 66N; BS; 65N; 31CR; BE; CM; 36CR; BM; 66N; EC..[.; N; 65D)

Cmnds: RC.FLP1_0LW145_CMO

primarily at programmers and suppliers of software, but it might ring a bell with users too. The QL has a clock function built into it but, unfortunately, it works only so long as power is supplied to the computer. A battery-maintained clock, as provided on the Gold Card, increases the utility of the function considerably. It is not really difficult to insert the correct date and time whenever a basic QL is powered up, though. To assist in doing this, a simple routine can be incorporated in a boot file, to prompt for the date and time to be keyed in.

What this is working around to is the failure of some programmers and suppliers to date-stamp the software they send in for review. A reviewer often receives several versions of the same program within a short period of time, and it is unlikely the disks will be the only things in the working area, so that the problem of deciding which is the latest version may arise. The date stamps on several copies of a program received for review recently were all in the 1960s. This wouldn't have mattered if the main program files had a version number at the front of them, but they didn't have one; the updates document on each of the disks referred to the latest version number, so there was no help there either. Programming should be an orderly business - please extend the orderliness to the documentation, programmers.

A time-setting SuperBasic

boot routine is illustrated. It is based on one supplied originally by Eidersoft, with additional display procedures from Mike Lloyd's collection. There have to be shorter ways of writing such a routine than this, but it serves to show what is required. A basic assumption is that the entire date and time are set wrong if the year is found to be wrong, and the "right" year is 1992; you have to change two entries of "1992" in subsequent years. Don't assume that having a battery-backed clock ensures the date and time will always be correct; I've found them incorrect several times on my own system, sometimes as a result of interference from software that was being tested but other times for no apparent reason.

Not Fair?

What has happened to the All Formats computer fairs? Not so long ago, they were occurring at London venues almost every month, but now they are few and far between and are being held at locations which may not be convenient for many of the people who used to visit the ones held in the Horticultural Hall. Are suppliers finding the faithful QL users still coming to the London fairs, or are the new locations putting people off? (QL people - especially people coming from the Continent - don't find either Sandown Park or the Novotel, Hammersmith, anything like as

easy to get to as the Horticultural Halls. Although Hammersmith is fairly central and right on a major Underground line, it is nowhere like as central as Westminster. Ed.)

AR Kempton got answers to his problem with the Taxan printer via letters in Open Channel, but a further comment is worth making. As the printer may be accessed by a "non-program" - eg the SuperBasic command line - when it has finished its job for Quill, it is desirable to do a complete reset at the end of each job, rather than at the start of each job. Putting the ESC@ command into the Preamble of the Quill Printer_dat file will work fine, for Quill, but has no effect on anything that comes after, so I suggest putting the same command into the Postamble instead (or as well, to play safe). There is then no need to issue a CR command, as ESC@ does that anyway. Incidentally, it was good to hear a voice that isn't often evident to the QL public these days - that of Chas Dillon. While we don't see Chas' name as author of any big new QL programs these days, his advice is still widely sought during program development.

```
1 Update:Leave
47 DEFINE PROCEDURE screen (chan,wide,high,x,y,col)
48 WINDOW#chan,wide,high,x+8,y+4:
PAPER#chan,0:CLS#chan
49
WINDOW#chan,wide,high,x,y:PAPER#chan,col:CLS#chan
50 BORDER#chan,1,0:BORDER#chan,4
51 END DEFine screen
52 DEFine PROCEDURE write (chan,txt$)
53 LOCAL gap
54 gap = "" INSTR txt$
55 IF gap
56 PRINT#chan:txt$(1 TO gap-1):write
chan,txt$(gap+1 TO)
57 ELSE
58 PRINT#chan:txt$
59 END IF
60 END DEFine write
61 DEFine PROCEDURE update
62 screen 1,145,38,252,36,20
63 CSIZE 1,0:INK 0
64 buff=PEEK_L(163916):POKE_L
buff+12,PEEK_L(buff+8)
65 :
66 LET year$=DATES$
67 IF year$(1 TO 4)="1992" THEN GO TO 100:ELSE GO
TO 68
68 LET a=1992
69 CLS
70 write 1,"MONTH?":getnumber:CLS
71 IF validflag$="T"
72 LET b=num
73 IF b<1 OR b>12 THEN GO TO 70
74 ELSE
75 GO TO 70
76 END IF
77 CLS:write 1,"DAY?":getnumber:CLS
78 IF validflag$="T"
79 LET x=num
80 IF x>31 OR x<1 OR b=2 AND x>29 OR b=4 AND x>30
OR b=6 AND x>30 OR b=9 AND x>30 OR b=11 AND
x>30 THEN GO TO 77
81 ELSE
82 GO TO 77
```

```
83 END IF
84 CLS:write 1,"HOUR?":getnumber:CLS
85 IF validflag$="T"
86 LET D=num
87 IF D<0 OR D>23 THEN GO TO 84:END IF
88 ELSE
89 GO TO 84
90 END IF
91 CLS:write 1,"MINUTE?":getnumber:CLS
92 IF validflag$="T"
93 LET E=num
94 IF E>59 OR E<0 THEN GO TO 91
95 ELSE
96 GO TO 91
97 END IF
98 LET F=30
99 SDATE a,b,x,D,E,F:CLS
100 INK 0:PAPER 2:CLS:CSIZE 1,0:write
1,DATES$:PAUSE 50:CLS
102 END DEFine update
103 DEFine PROCEDURE getnumber
104 DIM validflag$(1),num$(2)
105 LET validflag$="F"
106 INPUT num$
107 IF num$="0"
108 LET num=0
109 LET validflag$="T"
110 ELSE
111 LET num="0"&num$
112 IF num=0
113 LET validflag$="F"
114 ELSE
115 LET validflag$="T"
116 END IF
117 END IF
118 END DEFine getnumber
119 DEFine PROCEDURE leave
120 screen 1,145,38,252,36,0:CLS:CSIZE
0,0:CSIZE#2,0,0:WINDOW 322,158,89,49:PAPER
0:CLS
121
CLS#0:CLS#2:WINDOW#0,512,20,0,236:PAPER#0,0,1
NK#0,4:WINDOW 256,206,256,0:PAPER 0:INK
2:WINDOW#2,256,206,0,0:PAPER#2,0:INK#2,7
123 END DEFine
```

SUBSCRIBE TO SINCLAIR QL WORLD!

SUBSCRIPTION FORM

Rates (12 months)

U.K. **£23.40**
Europe: **£32.90**
Rest of World **£40.90**

Select back issues available on request. Please call for details.

Cheques should be made payable to Arcwind Ltd.
Please debit my credit card/Access/Visa

Card No. _____

Expiry Date _____

Please send me a 12 Month subscription to Sinclair QL World

Name _____

Address _____

Telephone No. _____

Signed _____

Date _____

Send the completed form to:

Arcwind Ltd
The Blue Barn,
Tew Lane
Wootton
Woodstock
Oxon OX7 1HA
Tel: 0993 811181
Fax: 0993 811481

Quanta in Bristol Area

More details about the next meeting planned by the Bristol Quanta group on Sunday 29 November, from 10am, at the Walton Park Hotel, Clevedon, Avon, south of Bristol on the M5 motorway. The meeting runs from till 4pm as usual, with traders stalls in the main conference room and demonstrations in an adjoining rooms. There will be a second demo room available on the ground floor if needed. Please let the Group know in advance if you want a stand or a slot in either of the demo rooms.

The Group will be putting on their famous Bring and Buy sale again. There is a bar and refreshments. Lunch is available if pre-booked with the hotel.

Overnight accommodation can be arranged at the hotel or at nearby lodgings. Sample prices (bed and breakfast per head per night) are: Walton Park Hotel £40 single or double (0275 874253) Cracklewood £18 basic, £24 ensuite (0275 8774717) Moor Villas £14 single £26 twin (0275 872131). Book direct with the hotels. **Further information on all fronts from Mike Ashford on 0272 629981.**

More PD Ware

SJPD Public Domain library has released its twenty-second disk of software. Disc 22 includes programs to print text files with accented characters, a text-column printer, address label database, a program-extension detector, a sector editor, a routine to add the QL under_score to files zipped on a PC, one game and other items. MicroEmacs 3.11 has arrived from Richard Kettlewell, and 60 disks of Continental software have arrived for sorting.

Like PD library owner Ron Dunnnett (September *QL Scene*), SJPD proprietor Steven Johnson hopes that he will be able to find assistants to translate some of the

Spain Calling

The Spanish QL users' group QL' per is now sending out its disk-based newsletter to other QL user groups around the world, hoping for a regular exchange of publications. They will also send and exchange with groups using MS-DOS formatting.

The QL' per disk is bimonthly, and material is generally free for use as long as the source and author, and the fact that it has been translated (if this is the case) are acknowledged.

A note is appended to say that some issues of disk 40 cannot be read, and 40 will be sent out again with 41.

QL' per can be contacted at **Acacias 44 (Monteclaro), E-28223 Pozuelo de Alarcón, Spain.** Comments on QL' per from anyone receiving it regularly will be appreciated at QL World.

Software87 Offer Exotic Wares

Software 87, renowned publishers of *text87*, is now also offering a range of software from Care Electronics, Jochen Merz Software and Cowo Electronic. *QSpread*, the new spreadsheet that can handle up to 32,000 cells; the latest *QDesign II*, the page design and drawing program, that now also works with JM-rom QLs and Minerva's extended graphics, and *Qpac II*, the established file and system manager, are now on the list.

QTop, Cowo's alternative file manager, *QD* version 4.00 and *ArcED*, two program text editors, and *FIFi* the fast file finder (which can search all files on a disk and display those with the keyword selected by the user) are also available.

Sample prices on Software 87's list are: *Qspread* £54, *QDesign II* £54, *QD* £44, *QPac II* £39. A mouse with a serial

cable is available at £49.

One advantage in buying software from Software 87's list is that it avoids the need to cover currency conversion charges and postage from exotic places like Germany, Switzerland and Watford.

Watford!?

Meanwhile, *text87 Plus4* has now been updated to make use of all the resolutions available on the forthcoming QL emulator card for the Atari MegaSTE and TT models from Jochen Merz. *Plus4* will be able to use the whole extended screen area to display up to eight documents simultaneously, with a maximum 95 text lines (up to two sheets of paper) in any one text window.

Software 87, 33 Savernake Road, London NW3 2JU.

Prices include postage. Leaflets about *text87* available on request.

DJC cares for Care

Dilwyn Jones Computing now has an agreement to sell most of Care Electronics' range of QL software (with the exception of Tony Tebby's Toolkit 2). The programs now on DJC's list are: Tony Tebby's *QPAC1*, £19.95, *QPAC2*, £39.95, *QTYP* £29.95; Steve Jones's *Sidewinder Plus*, £24.95, *Locksmithe* (mdv backup), £14.95; *4Matter*, £23.50,

Dutch, German, Spanish, French and Italian software into English.

SJPD also has a new archiving utility for the QL, *QL-Zip*. Expected in by the time this appears in print is Ergon Developments' *ZX Spectrum* emulator. SJPD's fifth catalogue issue appears on 1 December. The copy charge is £1 a disk, and the list is available from **SJPD, 36 Eldwick Street, Burnely, Lancs BB10 3DZ. Tel. 0282 51854.**

QL SCENE

Toolchest (mdv backup package, includes Locksmithe, £14.95, Toolchest (mdv doctor-writer utility) £14.95. All the programs except Locksmithe and Toolchest require an expanded memory QL. All programs except the mdv-specific items are available on disk only. More details to follow.

Meanwhile, the Jones family's latest production is Gareth Sion (Shaun to the Sassenachs), arrived 4 October at 7lb 12 oz, not available on mdv or disk, but possessed of a rapidly expanding memory (and lungs, no doubt). Congratulations to Dilwyn and Janet.

DJC, 41 Bro Emrys, Tal-Y-Bont, Bangor, Gwynedd LL57 3YT.

OPEN CHANNEL

Open channel is where you have the opportunity to voice your opinions in Sinclair QL World. Whether you want to ask for help with a technical problem, provide somebody with an answer, or just sound off about something which bothers you, write to:

Open Channel, The Blue Barn, Tew Lane, Wotton, Woodstock, OX7 1HA.

QDesign

With reference to my Qdesign user report (QL World September 1992), on reading it I realised that I had accidentally left in a sentence saying that it was impossible to escape from a print dump. This is wrong. You must hold the Esc key down for 2-3 seconds before it suspends the print dump.

**AF Wilson
Larbert**

Z88 rejection

I just received my May-June issue, and am glad to read that QL World is safely windsurfing back into orbit. I have a couple of small matters that need attending to. First, the US postal service is just as touchy as the UK postal service. Someone failed to include my zipcode - a Cardinal Sin to the US postal services. I do not like to see them too upset, as they have a nasty habit of losing your mail in the crevices of the post office.

Second, maybe one of your readers can shed some light on a slight problem that is troubling me.

The QZ program that transfers data from the Cambridge Computing Z88 has recently developed a neurological problem. It no longer wishes to play 'transfers' properly with my QL. Up until 1 May the QZ behaved correctly; now it no longer wishes to respond to the data transfer keys, the

Receive or Batch from the menu, but aborts the program. It will Send data from the QL to the Z88.

The same problem manifests itself using the Sector original mdv cartridge, and also on my buddy's QL system. We both have been using the Gold Card with the minerva rom and ED drives. For months the QZ program worked perfectly. Then, out of the blue, it does not wish to play by the rules.

Again, welcome back on board.

**W H Woodward
Lake Butler
USA**

Comment: One reputable QL expert hazards an educated guess that your serial port driver chip (the 1488) has blown.

Macs

I have had to start using an Apple Mac LC for a lot of work. I am happy with this machine, but miss the QL greatly. I do not have enough desk space to have both systems set up. I am aware that the 680X0-based Atari ST has a QL emulator available for it, and I wondered if there was a similar product for this 68020 Mac.

**D M Peberdy
Droitwich Spa
Worcs**

Comment: Much to our vexation, no, there isn't.

More Abacus

Here is one solution to the problem of how to order Abacus in reverse. Suppose you have a job in the range A1:D10 and you want to sort rows 3 to 8 in column C in descending order.

First go outside the job, for example, to cell F3, and press 1/C3 <Enter>, which will place the inverted sum of C3 in cell F3. Then ECHO cell F3 over the range F4:F8. Command F3 E<cho> cell F3 <Enter> over range F4:F8 <Enter>. This will give you an F column with inverted values of the contents in the cells you want to order in reverse.

Now you can order your job in reverse by sorting column F, rows 3 to 8. Command F3 O<order> F <Enter> from 3 <Enter> to 8>.

**Börje Johansson
Stockholm
Sweden**

Comment: E E Stocker's request prompted the largest number of responses since Dane Kurth's letter about in the QL World (the replies to that letter have been too long to publish and very much on the lines of 'let's discuss this further'). There were three small diagrams with Börje's letter but regrettably they were too faint to print. I hope the process will be clear when put into practice.

Boomerang

Hi Friends!

Due to insufficient addressing, I got my letter to EE Stocker returned. Will you please forward it to him/her? I wish you every luck in the future with your magazine.

**Börje Johansson
Stockholm
Sweden**

Comment: overseas readers please take note! Most people do not like their personal addresses to appear in a publicly-available magazine, so we do not print full addresses. We will forward letters if requested. Having said that. . . .

Africa

Here I am, miles away in Swaziland, off the beaten track, keeping myself amused with my two QLs and gradually learning more and more about them. But in my four years out here, I haven't found anyone else to communicate my discoveries to, in spite of having put notices in the local paper.

Perhaps QLers are so busy hacking, they don't have time to read the newspapers. As far as I am aware, no QL club exists in this area, but QL enthusiasts there are, I know, because I've seen QL World in newsagents both here in Swaziland, and also in Nelspruit, Johannesburg and

obviously sells.

Now I want to get in touch with some of those people, so that we can form a mutual support group. I am appealing to you to publish this plea of mine in the pages of your excellent magazine, so that anyone who lives in the Southern African region will feel inspired to get in touch with me, so we can put some life into the Southern African QL scene! The address is Box 52, Mbabane, Swaziland. Tel. 42997. Many thanks.

**Paul M Williams
Mbabane
Swaziland**

Archiving

Just to let you know how much I appreciate the Archive Answers programs, not in the least for their cute programming. The trouble is, I type them in, I enjoy them, and then I forget them until I need them, and then I can't find them and I don't even remember how to get them running. To solve this, I collected them all onto a separate disk, and wrote a small procedure which helps me find them and run them. That I used one of author Robin Stevenson's own procedures just proves how valuable they are. There are just three procedures, which I saved as ARANSWER, so the only thing I have to do is to run "ARANSWER" after Archive has been loaded.

```
proc ARANS
print: MODE
print at 1,10;"TOOLKIT
PROCEDURES FOR
ARCHIVE"
print at 2,10;"BY ROBIN
STEVENSON"
print at 4,10;"0: totaling-
procedures - may91"
print at 5,20;"command
COPYSTRUC (to make temp
file)"
print at 6,20;"commands
TOTAL en AVERAGE"
print at 8,10;"1: print
procedures may92"
print at 9,20;"commands
TABLE en LIST"
print at 11,10;"2:form print
procedures jul92"
print at 12,20;"commands
with F keys"
print at 14,10;"3: fields (file
structure) may92"
```

```
print at 16,10;"CHOOSE
MENUE: 0, 1, 2 OF 3"
print
endproc
```

```
proc MENUE:OPT
if OPT=0: run object
"TOTALS": endif
if OPT=1: run object
"TABLE": endif
if OPT=2: run object
"FORM": endif
if OPT=3: load FIELDS: endif
endproc
```

```
proc START
ARANS
endproc
```

To get a little more speed, I changed the subject programs in object files by saving them as "save object "filename", and further provided them with a start procedure which opens again with a helpfile, showing a.o the commands to be used, which then can be typed in on the command-line.

For TABLE the startprocedure reads:

```
proc start
cls
print at 3,10;"Insert data
disc"
print at 4,10;
"command:TABLE(LIST);"filen
ame","logname",
print at 5,19;
"option","extraline"
print at 6,10;"(multiline or
single line output)"
print at 7,10;"ask directory
for exact filename"
print at 8,10;"if no other
open files enter "" for log$"
print at 9,10;"if Opt$=""
output will be to printer"
print at 10,10;"TABLE
needs any parameter if
extraline required"
print at 11,19;"[" " ] gives
blank line, [""] gives no extra
line"
print at 13,20;"NOW TYPE
YOUR COMMAND"
endproc
```

Something like this can be made for Numberhandling (Nov 91) and Totalising (May 91), whereas in Direct Typing (Jul 92) the program contains its own start. Any new program running under Archive that suits your needs

you can include in the first program.

So much for my own invention.

In return I would appreciate it if a correction could be published on the NewPage proc (June 92) where the last line is corrupted. I have some trouble getting a proper page break. If working Table, it asks for a new page after 2 to 6 lines, while when using List, the screen scrolls without making a break. I tried "let LINE = LINE+1: endif : endif ", but this makes no difference. For a moment I thought the bug was in PrintList, as this is a really intricate "if else, if else" construction, but I can't find anything wrong there, so in the end I gave up. I hoped someone else would have rung the bell already, but finding nothing about it in the September issue, please don't let me down.

**Albert van Rheenen
Amsterdam
Netherlands**

Comment: Our apologies, Albert. We now know that Robin has been in touch with you, and we will try to get some of his comments from other readers' interest. Robin can be hard to pin down as he works away from home a lot. Unfortunately, as we received your letter on 16 September (a week after the October issue had gone to press ...) this is the earliest issue we have been able to mention it.

Postamble

In reply to A M Kempton's letter in the July QL World, he should type:

```
'cr,'ff
```

for the postamble code in the printer driver.

**Stewart Honeyball
Miracle Systems**

Editor's notebook

Two trends are showing themselves in the QL market, both beneficial to QL users. One is for software and hardware producers to licence fellow-producers to carry their goods on a wider scale than before. This is especially useful for continental producers wanting to get their products to UK users, and vice-versa, because currency exchange charges on small transactions have always been a bugbear.

The other trend is for an increasing interest in Public Domain software. Diverse and devious though some of it is, the range of choice that it offers to users can hardly be without at least some small thing of interest to every user. There is also a greater trend towards shareware. There are some items of interest in this month's QL Scene on both subjects.

Apologies yet again for the alarmingly late issue (more detail in QL Scene). And more - we had to retrieve some mags from the Post Office because in our eagerness we double-printed a set of labels. If you get two copies - give one to a PC user. More haste, etc.

Fill in the survey on page XX - and send it to us. There's a free year's sub in it for whoever wins the draw. I know the Post Office gets the stamp-money - but console yourselves with the thought: somebody will be reading it, so you have *one* vote which may actually benefit you in these troublesome times.

TRANS24

Trans24's purpose in life is to make 24-pin use of programs which only have 9-pin drivers. Bryan Davies tries it on his GQ 5000.

INFORMATION

Program: Trans24
Price: £10 (plus £1 post & packing outside UK)
Supplier: Dilwyn Jones Computing, 41 Bro Emrys, Tal-y-Bont, Bangor, Gwynedd LL57 3YT. Tel. 0248 354023.

This is a program which has me feeling that almost everything has been said about it once the price and supplier have been given. That is not meant to be uncomplimentary - the program is a simple one, it is cheap, and it works.

DJC specialises in the "no frills" end of the QL market, and it is good that this is so. There are quite a few QL users who don't want to spend over £50 for each program, and maybe don't want to tussle with complex programs and instruction manuals either. You can't have do-everything programs which need no instructions for £10, though. Trans24 has but a single purpose - to enable 24-pin dot-matrix printers to be used to advantage with programs which do not have 24-pin printer drivers.

Examples

Examples quoted of programs which provide output for 9-pin printers, but not for 24-pin, are Easel, GraphiQL, PCB Designer 1, Page Designer 2, Desktop Publisher 2, Professional Publisher, QRam and Sidewinder. In fact, although earlier versions of these programs may not have 24-pin drivers, later ones of some of them do. The printers with which Trans24 is stated to have been tested are the Star LC-2410, all Epson LQ models, all Epson SQ and GQ models using LQ emulation, and the NEC 2200. For this review, an Epson GQ-5000laser printer was used, set to its LQ-2500 emulation mode when used with

Trans24, and to its FX-80 emulation mode when comparison tests were made with 9-pin output from Professional Publisher and Easel. The LQ and FX are two of the 24- and 9-pin (respectively) standards you are most likely to meet emulated on other printers.

The printed instructions occupy seven A5 pages and are sufficient for most purposes. There isn't really much to be explained. Some notes are rather unclear, and a degree of understanding of QL operation is desirable, to be able to "read between the lines". One of the instructions is to set "TRA 0" if your QL has a JS or Minerva rom. While this might present no difficulty for a user who is also a programmer, the non-programming person is going to find such an instruction meaningless. Ignoring it did not appear to create any problem with the review on a JS QL.

Trans24 requires just a basic QL. It is primarily intended for use with floppy disk, although it is possible to use it with microdrives. The restriction is in the size of dumped files, which can be too large to fit on single cartridges. Multi-tasking is no problem, the F4 key being used to refresh the Trans24 screen. As graphics printing often takes several attempts before the desired result is obtained, it is convenient to be able to switch between your DTP or graphics program and Trans24, and not have to reset at frequent intervals.

Creates

The program creates 24-pin printer output from the 9-pin output files of the originating program. It is therefore necessary to be able to send output to a disk file in the first place, and not all programs offer this facility. Easel is quoted as one program which won't allow output to a file, but there is a menu option in my version that does offer a screen dump to a file. This command produces a 32 KB file on floppy disk without trouble, but an attempt to print this file from Trans24 resulted in the all-too-familiar sight of

sheets of paper streaming through the printer, with only a line or two of garbage at the top of each one. The instructions with Trans24 are written in somewhat quaint English in places, and the meaning in this area is not obvious at first. The intention seems to have been to say that Easel produces what would normally be called a screen dump - a pixel-by-pixel copy of the screen image - when the option to print to a file is chosen, and Trans24 is not designed to print from screen dump files. Unfortunately, the word "dump" is used in the instructions where printing to a file is referenced, which can cause confusion.

What is meant is that the GPRINT_PRT printer driver file has to be modified to make Easel print to a file in a way that will allow Trans24 to use that file. A small SuperBasic routine is provided to modify GPRINT_PRT suitably. The device name is changed from SER1H to what you choose, such as FLP1_E. Any print action from Easel subsequently will send the file to flp1 and give it the name E; you have to remember that a second print will overwrite the first, and so on. If you are in doubt about whether or not a file is a SBYTES command screen dump, or is a print to file, check the number of bytes in the file; a figure of 32768 bytes indicates a screen dump.


Blacker

The different number of pins in the print head of a 24-pin printer create an obvious problem when the printer driver is for a 9-pin head; as the extra pins "don't exist", they can't be used. This results in black areas looking faint. Trans24 brings the other pins into use and so darkens these areas. Some text will look better because of this, although small text may look rather worse through character strokes being too wide.

The two illustrations are of prints made with Trans24, one from a picture provided with Professional Publisher (COMPUTERS_PIC) and the

TRANS24

What Do You Do With Your QL?

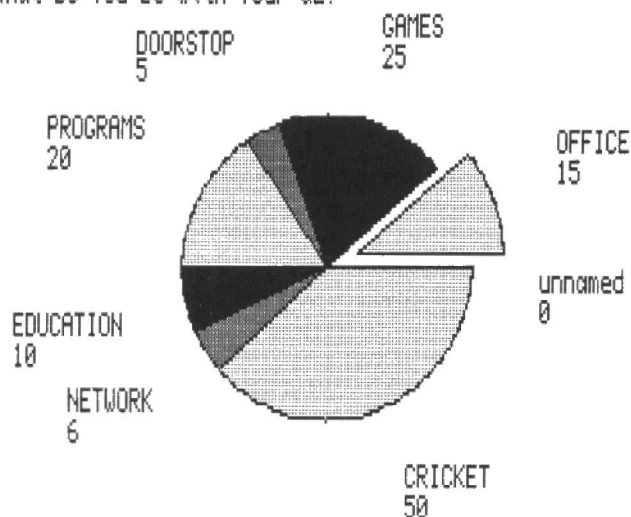

other from a simple pie chart created with Easel. In both cases, the original pictures were printed to a file. The modified GPRINT_PRT file was used for the pie chart. The version of Professional Publisher used was the current one, which can print to a 24-pin printer, but the basic FX-80 driver was used here, purely to obtain a 9-pin disk file.

You have to bear in mind that the quality of the print depends very much on the program and driver from which the data originates and a 24-pin printer cannot miraculously produce photographic prints from "dotty" images. Trans24 appeared to alter print dimensions in some cases, but that was actually beneficial in the case of pie charts from Easel, as the shape of the pie was more circular. As I have found when making screen dumps for reviews, using 24-pin mode gives darker and more acceptable prints than 9-pin mode; a similar effect can be obtained by photocopying. While there is no real change in quality, the perception is of a better print. If you regularly make use of prints from a DTP or graphics program which has no 24-pin driver, Trans24 is an inexpensive way of gaining an improvement.

JOCHEN NERZ SOFTWARE

Im Stillen Winkel 12 - D-4100 Duisburg 11
Germany - Telephone & Fax: 0203 501274

It is done: QYME - the QL-Emulator for the Mega STE exists!

No so dering and unbelievable features: fully programmable, screen resolution, horizontal & vertical frequency etc. can be changed while the system is running! If used with a good Multisync monitor, you can get resolutions up to 1024x780 pixels!!! Or how about 896x896, or ... it is up to you! Of course, you can get the good old 512x256. It runs right now on the STE, we're working on the TT software and an adapter to put it into Mega STs. The price is £256 - write for more details!

QD 4 - Editor using the Pointer Environment, with many new options: GOTO BASIC Procedure/Function, Label, improved parameter string, print, search/replace and MenuConfig (the same as Config, but menu-driven, new Vers.) £38. Upgrade from V3 £10

QSpread - Spreadsheet for the Pointer Env. More than 32000 cells. Completely pointer-driven, up to 3 horizontal and vertical splits at the same time. Formulae-orientated, 22 scientific functions, macro functions, help, scrap, etc. £49

QMenu - Menu Extension V3 QMenu is an interface to pre-defined menus (e.g. file-select, sample-choice boxes, select from lists) which are very easy to use. These menus may be used by SuperBASIC, machine code and other languages. The menus are very comfortable, multi-column etc. £12.90

Update from previous version with new manual £5

FIFI - the FileFinder FIFI is extremely useful and saves a lot of time: it scans devices or directory trees and searches files or filenames for strings. Combinations are possible, e.g. String1 AND string2 BUT NOT string3 etc. £13

QDOS Reference Manual - This book is a must for all machine-code programmers. It explains how to use QDOS, all traps and vectors, the Thing System, the HOTKEY Syst.II and much more. It shows which features work on a QL, an Emulator, how to write compatible for future operating systems. 170 pages. £27

QPTR - The Pointer Environment Toolkit. Revised manual which describes how to use the Pointer Interface and the Window Manager from SuperBASIC and machine code. Examples on disc, keys, macros & extensions for SuperBASIC. £27

FLP/RAM Level 2 with ATR!!! Replacement EPROM for QBoard (V1.17 onwards, with & without mouse) or Trumpcard (please specify!). Real sub-controllers! About twice as fast, improved save-block-handling! (not on JM-ROMs) £18

EASYPTR II - Create your own Pointer-Env. menus & sprites, use them in your SuperBASIC or machine-code programs. Supports all the PE facilities, even split application sub-windows and uses the Menu Extension! Many examples! £49

SYSTEM - System Tools for QDOS: real file-attributes are added, e.g. write-only, hidden or for selected users only. Works even over net and on winchester. New TRAP 3. New devices (equiv. to QL-Emu.): named pipes, MEM, NUL. 80 new procs & features, e.g. WSET_FATTR, WSET_FVERS, ADIR, ASTAT £27.50

QDesign II - more features, improved and more printer drivers (incl. laser), QSnap which scans text from screen and puts it into scrap, virtual drawing mode on Emulator and Minerva etc. £48 Upgrade from version 1 £13

VecEdit Vector-Font-Editor for QDesign £19

NEW: SER Mouse V2 - software driver which lets you connect a serial (e.g. IBM-style) mouse to one of the SER ports of the QL, which then mimics the QIMI i.e. On a 3-button mouse, you have ESC, Wake & Sleep in addition. £14

The Lonely Joker - three great patience card games. Needs Toolkit II £14.90

Diamonds £11 - BrainSmasher £12 - Arcanoid £10 - Firebirds £10
SuperGamesPack £25 - QShang £14 - QSUP System Utility Pack £26 Thing & Eprom Manager £18.50 - DISA (Intelligent Disassembler) £27

QL-Emulator Extended4 (as long as stock lasts) £139

Floppy adaptor to connect QL diskdrives to the ST £9

Very special offer: Harddisk unit for the ATARI ST (without harddisk): case for Syquest changeable drive AND 5.25" or 3.5" drive, PSU, host-adaptor (100% QDOS compatible), cables, driver, thermo-controlled ventilator etc. £120

QDOS on a 68030 (in every Mega ST) running at 32MHz: incredible speed (approx. 8 times faster than a ST, 20 times a QL) together with new E-Driver-Software. Write for more details! Price: 32MHz Version £600, 25MHz £500

NEW: E-Driver software with new initialisation: boots faster, runs faster, needs less memory, boots from harddisk without EPROM, more features inbuilt etc. The way forward, as level D ends at D.16. With new manual £17

Technical Printer Manuals:

EPSON ECS-P/2 for all EPSON 9/24/48 pin printers. 500 pages £27

HP Deskjet for the Deskjet family (including 500C) £15

Please add £4.50 for p & p (Europe) or £4.50 for one item and £2.50 for every further item (Overseas). All prices excl. V.A.T. E&OE.



Please write or call (English & German spoken) for more information.
If you are interested in a Customer Support Mailbox, please write to us!

ENQUIRE

Quanta in Ashstead

A new Quanta subgroup is planning to meet in Ashstead, Surrey, on the last Wednesday of each month. The first meeting took place on 28 October at St. Giles Hall, off Park Lane, Ashstead (Map ref. 192580, sheet 187. No excuses for not finding the spot!) from 7.30 to 10.30 pm.

For more information contact **Anthony Gordon, 13 Beales Road, Great Bookham, Surrey KT23 4NA. Tel. 0372 458180**, or leave a message on Tony Firshman's bulletin board on 071 706 2379.

American Mag Into Second Year

American QL fanzine International QL Report: published by SeaCoast Services, entered its second year of publication this year. IQLR contains a mixed diet of news and product information, handy hints and tutorial articles, meeting reports and advertisements. [get the recent issue from Jim and fill in some contents information.]

The mag is around 40 pages of standard US-size paper (11 by 8.5 inches) with attractive parchment-look cover-pages, very readably-printed with about 450 words to the page - about the same quantity as Quanta, on average, but in a larger typeface. (For comparison, QL World has around 1400 words to a full page, in roughly the same typesize as Quanta). IQLR has a very similar 'feel' to Quanta; perhaps a little more 'spacy' with larger headlines and text in ragged-right rather than fully justified. That is where the resemblance ceases, however, as IQLR does not seem to have any user group or library facilities.

IQLR is published four to six times a year, with size determined by the amount of material. Subscription rates are US\$14.95 per year in the US, US\$16.95 in Canada, and US\$28.00 for the rest of the world. Fees are accepted in US dollars, or "Pounds Sterling or DM (German Deutchmark) bank notes (currency) equivalent to the \$US amount". (Bear in mind that it is risky sending currency notes through the post, and consider getting a \$US money order if you wish to subscribe - but check that it is non-negotiable, or it will be no safer than cash.) Their subscription year runs from 1 May to 30 April annually; mid-term subscribers will be sent back issues for the current year.

IQLR, Seacoast Services, 15 Kilburn Court, Newport, Rhode Island, USA.

New England Elections

The **New England QL User Group** has elected hardworking director pro-tem Ernie Wider to fulltime Director of its activities.

The elections were a little overdue, says NESQLUG News editor Peter Hale, because of pressure of work and a very club predicament - "When there are six posts and six people, only backroom bargaining can make it all work!" Actually, NESQLUG has more than six members, but obviously only six who are crazy enough to do the dirty work! Ernie himself has been unwell lately, but he made it to the election meeting. Medical opinion has it (whether officially or unofficially, we don't know. You will have to plumb your own experiences for the answer, no doubt!) that Ernie's obligation to serve a year as Director of NESQLUG is doing as much, if not more, to assist his continued health as all the ministrations of medical science.

A long-time Sinclair user, Ernie persuaded his department to get him a Thor. When he retired, his department were apparently keen to have their turn with the one-time Super-QL - but nobody knows how to use it. This looks like the time for Ernie to set up as a consultant ...

Miracle on the Road

Miracle Systems will be exhibiting at the following fairs and meetings in November:

- 14 November
All Formats Fair, Novotel, Hammersmith, London
- 28 November
Quanta Workshop, Manchester
- 29 November
Quanta Workshop, Walton Park Hotel, Clevedon, nr. Bristol
- 29 November
All Formats Computer Fair, City Hall, Candleriggs, Glasgow

Glasgow and Clevedon on the 29th? We've heard of Miracles, but surely even Stuart can't move that fast, can he? Unless (as has sometimes been conjectured) there are two of him.

In fact, Miracle's Mike is going to Glasgow; if he can't make it, they'll miss Glasgow this time, but Bristol is definite.

Archive erratum

Half a line dropped out of the Archive proc NewPage on page 30 of the June QL World (as Robin and various readers have recently pointed out). The line should have read:

```
let line=1: endif : endif
```

Late

We used to say that just about the only thing that couldn't be blamed for delaying a magazine was the weather. Now even the weather has its say. Our production team came back from an overseas windsurfing conference - September and October are popular for the large autumn waves - early in October and discovered that, in their absence, *QL World* had not only not been distributed, but had not cleared the printers. A certain amount of panic ensued. That is the answer to the much-asked question: "What happened to the October QL World?"

We regret that the accumulation of events will also delay the production of the November QL World unless we can get it through the printers in record time. We apologize to readers for any inconvenience and worry that this delay may have caused them. (To add insult to injury, Mark and Jim's week in chilly Brighton was almost totally wave-free.)

In the Workers' Council we wanted to design a logo to go on all our agendas, minutes and publications to make them stand out from the other documents that circulated in the agency. I found myself more and more obsessed with one idea for this logo which I would never have dared to suggest in practice. On the *Professional Publisher* disk there is a clip art file 'Timepieces_pic' which contains among other things a picture of an alarm clock with a grinning face. It conjured up associations in my mind of the Workers' Council waking the company up, especially if the clock could be set to the time our council meetings began. As about half of the agency's staff had sleeping-in duties, most of whom were not in the best of humour first thing in the morning, it also appealed to my sense of fun. What has all this to do with desk top publishing? Well, this article is about trying to be creative in the design of your documents and adapting your fonts and clip art to your own needs. As an exercise I tried changing the time on the alarm clock from 2.38 to 9.30, and the result appears as **Figure one**. The clip art was loaded into *Eye-Q*, a copy of the clock was made and the image of this copy reversed. The hour hand of the reversed image was cut and pasted onto the original, giving a two-hour-handed clock. The original hour hand was erased and a new minute hand drawn in. This was less than a hour's work and the result was a tailor-made piece of clip art.

Putting in depth

Some quite simple, but good effects, take much less time than this. For example, the use of shadow effects. This is shown in **Figure two**. Your message is written and a box drawn around it, this is cut and pasted to another place and the image inverted. The original is then cut and pasted onto the inverted image using a slight displacement and hey presto! you have a shadow. For extra effect a clip art star

can be added, but this involves extra work tidying the image up. Another type of shadow is shown in **Figure 3**. Here the text is typed in using the normal font and then typed in again, but this time as an upside-down italic font in a stippled ink colour. The two lines of text are then carefully lined up by carefully scrolling until it is in the right place. Effects of depth are often used to add interest to a page, especially when business graphics are used. Unfortunately *Easel* has now become a little outdated because it only has two dimensional graphics, which look rather dull by modern standards. You could add interest by using symbols from clip art or symbols fonts. Alternatively you could try Mike Lloyd's 3-D bar graph program, or my *3-D pie* program (*QL World*, November 1990). It is also possible to use output from PC graphics programs, but more of that later. Both **Figure three** and my next effect shown in **Figure four** are based on suggestions in the Desk Top Publisher manual. One page of this manual illustrated various effects which could be obtained by using the program. If you can get hold of a copy of the manual it is worth looking at the page. **Figure four** illustrates the effect of printing a font on a background design. First you lay down the background (from font A in *Professional Publisher*) and print your text on it. For a good effect you can change the colour of the font from black to white and print out the text again over

the original text, using a slight horizontal and vertical displacement. Both the QL design and the writing on the wall also give a good effect if the colours are inverted. I have not done this in the illustration as it does not give a good result using my printing technique.

Printing techniques

For those readers who are interested, the illustrations for this series of articles have all been produced on *Professional Publisher* using reduced width and length printing and two passes of the printhead. My printer is a Brother 1409, which is a 9-pin dot matrix printer. It does illustrate the very high quality that can be obtained from *Professional Publisher* even using a simple printer. When using a background to letters or a stippled text it is important to bear in mind what printing technique you are going to use. With reduction printing the stipple becomes more dense and may become indistinguishable from plain black. If you look at **Figure five** you will see only five As, although in practice there are six. The top right hand one is indistinguishable from the background. There should also be white dots on the dark parts of the right hand As, but they cannot be seen. If you are using reduction printing you should use very pale backgrounds, sometimes so pale that they are only just visible on the screen. The use of stipples in letters can induce a panic in some users, because lurking in the depths

Question A Q of Dots Part 4

**Geoff Wicks tells
the story of The
Logo That Never
Clocks On**



Fig. 1. The various stages of changing the time on a clip art clock - not an hour's work.




Fig. 2. A shadow effect gives depth - the addition of a clip art star adds to the impact.

of both *Desk Top Publisher* and *Professional Publisher* is some dreadful computer jargon. When you merge fonts or brushes you have to choose between OR, XOR and AND. You can of course try to find out what these terms mean by consulting the *QL User Guide*, or Jan Jones' *SuperBasic*, but if you are like me you will not be much wiser for doing so. However good the explanations of the terms may be, they do not really help you in understanding what the effect will be in your document. There is a fairly good attempt to do this in the *Professional Publisher* manual, by describing what happens when you merge a forward slash with a backslash. You can see the practical result in Figure five. As well as the effect of merging an A in the three different styles, try it first as a black letter on a light background and then as a white letter on a dark background.

Two colours

In practice there are only two colours in desktop publishing, black and white, so you can simplify the situation in a way that the computer purists would probably not approve by saying that in an OR merge black on black and black on white both produce black, in an XOR merge black on black produces white and black on white produces black whilst in an AND merge black on black produces black and black on white produces white. Try following this in Figure five.

Clip art can also be used to add effects to a page. There is quite a wide range of clip art available for the QL from a number of suppliers. In addition the *Professional Publisher Toolbox* contains a routine which permits you to use Sector Software clip art in *Professional Publisher*. Maybe it is heresy to write this in a QL magazine, and perhaps there are readers who will want to burn me at the stake for even thinking it but it is also possible to use PC clip art if you have *Solution* or *PC Conqueror*. The secret is to modify the boot program of *Solution* or *Conqueror* by

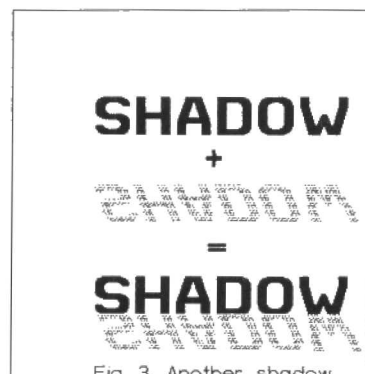


Fig. 3. Another shadow.

replacing EXEC flp1_ by EXEC_W_flp1_. When the clip art is loaded press Ctrl-Shift-C to return to *SuperBasic* and save the screen by using the direct command SBYTES flp2_screen,131072,32768. (You should, of course, keep flp2_ free for Qdos, or alternatively save the screen to microdrive). You may find some slight colour distortion on your screen and you may have to recolour red or green to black or white. PC clip art often appears horizontally compressed on a QL and you may have to magnify it horizontally before using it in a document. If you do use PC clip art, however, be very




Fig. 4. Letters can be printed on a patterned background.



Fig. 5. Merging fonts in 3 different styles.

attention towards the text and not away from it. In **Figure six** is an example of poorly placed clip art and two possible ways of correcting it. One of these ways involves electronic manipulation of the image, and if you wish to get the best out of your clip art you should not be afraid to do this.

Recolouring

In this respect *Professional Publisher* is a very versatile program, since it contains routines for recolouring both mode4 and mode8 pictures in a monochrome texture; for inverting and reflecting the

programmes. One of the sad omissions from *Professional Publisher* is a routine for saving a screen so that it can be improved in a graphics program, although there is a program for doing this on the *Professional Publisher Toolbox* disk.

Magnifying and reducing images can be helpful when you need to fit a picture in a column, but can have disadvantages. When magnified some images will have jagged edges and when reduced some detail may be lost. In general magnification and reduction work better with solid images that with line drawings. If you have a copy

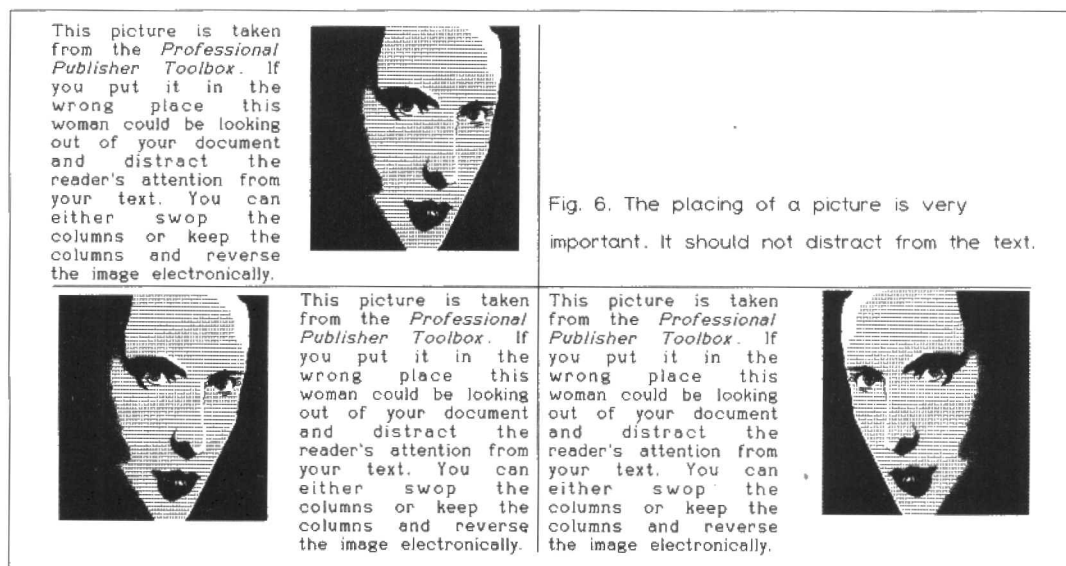


Fig. 6. The placing of a picture is very important. It should not distract from the text.

careful about copyright. It may not be legal to use your firm's clip art in your private documents. Read the small print! Clip art can spoil your document rather than enhance it if it is incorrectly placed. It should draw the reader's

image or producing a symmetrical version of it; for slanting the image; for recolouring it; and for magnifying or reducing it. Alternatively the image can be manipulated in a similar way in one of the QL graphics

of my last article look again at the steam engine illustration. The one in which the image size was changed was magnified once horizontally and then reduced twice horizontally to get it into a better proportion. There was

little loss in quality. Slanting an image helps to give depth or in producing a shadow effect. It is quite impressive to see the routine in action. Symmetry allows half the screen to be reflected vertically or horizontally. Do it once vertically and once horizontally and you can obtain a kaleidoscope effect. In

Figure seven this is done using a clip art quillpen and modern pen. In my final example I am afraid I am going to bore you with politics. The reason I am doing this is because I have suitable clip art available. Suppose I have written an article on the political parties in Britain and wish to illustrate it by referring to the result of the 1987 General Election. I have two suitable pieces of clip art. One is a map of mainland Britain showing where support for the main parties is and the other is a three-dimensional bar graph prepared on a PC business graphics program. Both are mode 8 screens in 5 colours.

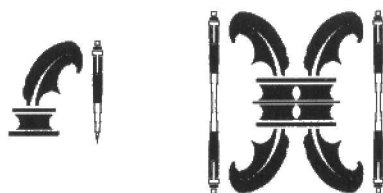


Fig. 7. A clip art kaleidoscope effect.

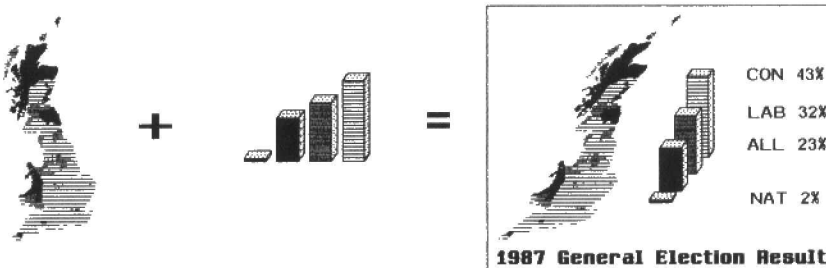


Fig. 8. Combining two separate clip art pictures into a more interesting illustration.

Combining

Firstly both screens are recoloured using the mode 8 texture routine in Professional Publisher. Each could be used on their own but they would lack impact. **Figure eight** shows the effect of combining them. Firstly the map is

slanted to give an impression of depth and the bar graphs are added using clip and paste methods so that they overlap one another. The illustration is put in a box and captions are added. It took only a few minutes to do and the result is a more professional-looking picture.

For me this was the fun article and I hope you will enjoy experimenting with my suggestions just as much as I did when trying them out. In the next article it is back to more serious matters and a little bit more humdrum work when we take a look at designing fonts.

plus4 A Quantum leap in QL Wordprocessing

Users have expressed their verdict in letters published in Quanta!

+1 USER FRIENDLY TO THE EXTREME

Context-sensitive help * File selector boxes * Highly compatible with Quill.

+2 THE MOST POWERFUL QL WP

Reformats as you edit * Remembers paragraph formats between sessions * Integrated spell checker with dictionary browse and replace * Multiple Windows over multiple documents allow you to edit one text while looking at a different one for reference * On-screen page-preview and pagination accounting for columns and variable line-spacing.

+3 UNRIVALLED PRINT QUALITY

Nothing else can compete in text and character formatting * Fully supports proportional spacing, mixed character widths and justifies correctly * Multiple paragraph formats with different margins and line-spacing for each * Right, centre and decimal tabs * Multiple columns plus headers and footers * Desktop publishing with several different page layouts in the same document. All the above features available at the highest text-mode letter quality resolutions of 360 x 360 dots per inch (24-pin printers) or 300 x 300 dpi (deskjet and laser) at fast print speed and with very large texts.

+4 FASTEST QL WORDPROCESSOR

Amazing timings on QL and 8 MHz Atari ST with QL emulator. Gold card would be much faster than both * A 70 page text (24,000 words, 141,000 characters) was used * **Load** (first time from floppy disk--not ram disk or slave blocks): 25s (STQL 17s) * **Save** (to floppy disk): 37s (STQL 32s) * **Search / Replace** 580 instances (auto reformats the affected paragraphs to account for different lengths of search and replace strings--not leaving

you with hundreds of lines with ruined format to sort out manually): 43s (STQL 14s) * **Change right margin** of whole text (with complete reformat): 65s (STQL 17s) * **Move 10 pages** from top to bottom (times include manual marking and positioning of the text and reformat after the move): 35s (STQL 15s) * **Scroll full screen** over text 100 lines (full screen line by line--not just the last line, not just the last line over every 10th or 100th line of text): 19s (STQL 5s) * **Change justification** of whole text (change is instant, times represent full screen refresh after the change): less than 2s (STQL 1s) * Many other operations (e.g. goto page, line, top, etc., case sensitive search, insert typefaces, auto reformat of edited paragraph, change individual paragraph margins) are instant, with only a quick screen refresh to complete the task.

Fully compatible with all QL ROMS, Gold Card, STQL, QVME STE in high resolution, Thor. Requires disk drive and 256 K memory.

Prices (payable by cheque -- air mail overseas)

text87plus4	£79
2488 drivers for 24-pin and bubblejet printers	£19
typeset90-deskjet drivers for all HP Deskjets	£19
typeset90-Epson drivers for Epson Lasers	£39
fountext88 + founded89 graphic driver	£39

Also: QDesign II: £54 * QSpread: £54 * QPac II: £39 * QTop: £34 * QD4: £44 * ArcEd: £24 * FiFi: £19 * Mouse £49

Software87, 33 Savernake Road, London NW3 2JU

DEMO!

We have produced a working demo version of plus4 to try for yourself. The demo has all the commands apart from save, export, spell check and print (sample print output for different printers is included). Send £2 in postage stamps (no cheques please) to get your disk and leaflets.

Tidy SQLUG

You've heard of software, wetware and shareware. Now meet SQLUGware.

Something you step on in the garden? Not unless your post-person is unusually careless. SQLUGware is (and we quote) "a special kind of public domain software for the QL, designed specifically to increase awareness of the Scottish QL Users Group. Packages released under this banner will have been written by members of the Scottish QL Users' Group. They will be self-contained, fully-working programs with (hopefully) wide appeal."

In other words, as well as attracting attention to their own QL activities, SQLUG are supporting other QL users and support groups.

SQLUGware packages may be copied and passed on freely, provided that the package is intact and the documentation explaining SQLUGware is present.

User registration for this essentially shareware package can be on one of three levels: No registration, for light users, where the package is used as standard public domain software. Recommended for more serious users is either Level 1: fill in a form and return it to SQLUG with a stamped self-addressed envelope, and you will receive news of the next update when it is ready, after which you can obtain it (eventually) from your usual public domain sources OR send two 3.5 in DS/DD disks (one for your update, one as a donation to the group) complete with return postage and packing, and you will receive the next update. Level 2 (full) registration costs £5 UK (£7 elsewhere) payable to the Scottish QL Users Group (address below). For this you will receive upgrade disks as soon as they are available. One upgrade is guaranteed; up to three will be sent automatically. A printed

version of the manual, plus upgrades, will be sent, and level 2 enquiries will be given priority.

Before registering, check that the package you are registering for is not more than two years old. If it is older, check with the group for current fees, terms of registration, etc.

SQLUG group members will receive information in the group's newsletter, and access to the group's library service.

They also very kindly recommend that users who can, support the QL by joining QL World and Quanta.

The Program

Alan Pemberton's Disktidy has been made available as SQLUGware. Disktidy assists people with large disk collections by keeping a record of the directory of every disk in a collection. Disktidy allocates each new disk a number. When you have made significant alterations to the contents of a disk, run Disktidy to update the directory records. As well as the obvious usefulness of being able to scan all your disk directories, and search for filenames with Disktidy, the program also imposes a minimum necessary discipline on your disk collection by allocating disk numbers.

You will come to wonder how you ever managed without it.

System requirements for Disktidy are twin disk drives OR a hard disk plus one floppy drive; SuperToolkit 2; ramdisks. The standard Trump Card or Gold Card systems fulfil these requirements. If you have any queries (about the ramdisks, for example) no doubt SQLUG would be willing to assist. Free memory making the use of slave blocks possible gives faster operation.

The Group

The Scottish QL Users' Group was set up in 1989 to provide a meeting-place for Scottish users. Meetings are held monthly 'in a reasonably central location, such as Stirling' to try out software, discuss developments and swap notes about problems. The newsletter reports on meetings and carries items of news and general interest. Membership is by subscription to the newsletter (currently £6 a year).

All enquires about the program and the group to Alan Pemberton, SQLUG, 65 Lingerwood Road, Newtongrange, Dalkeith, Midlothian EH22 4QQ.

Hessler Handles Hermes

Sales of TF Services' Hermes intelligent peripheral controller in Germany are being handled by Albin Hessler Software, Im Zeilfeld 25, D-7447 Aichtal, Germany. The price is 79 Deutschmarks. Tony Firshman says: "Hermes is a good complement to Hessler's serial mouse driver, and version 2.04 or higher will allow the use of the Hermes split baud rates to drive a serial mouse at 1200 pbs at the same time as, say, a printer at 9600 bps." Albin Hessler has written some "more friendly" commands for setting the baud rate, which are now included with the UK release.

TFS are working on some new developments to Hermes, the split baud rates for the serial outlets being the most important. Combined with Hermes for serial input, this will give serial ports with completely independent baud rates.

TF Services, 12 Bouverie Place, London W2 1RB. Tel. 071 724 9053.

After reading David Drysdale's comments in the April QL World, about the problems he had importing Z88 files into Quill, I thought it would be worthwhile looking into this topic in a little more detail. I had a SuperBasic routine for massaging MS-DOS files into importable shape, and have now expanded it so that it can extract the sense from more or less any file containing text in importable form. (It should even pick out the plain text messages from a machine code program - if there is any point to this.)

Let's start by examining the nature of a word processor file. Obviously the bulk of it will be the text you have typed in, but interspersed with this will be various control codes which tell the system when to change type styles, start new paragraphs, how to set the margins, etc. In a WYSIWYG word processor, like those available for the QL, these are used by the screen driver to display the text in the same form as it will eventually appear on paper.

Printer driver

The purpose of the printer driver is to translate these codes into the appropriate ones for your printer at the printing stage. Some under-developed word processors on lesser machines only work properly at the printing stage. Just as different printers use different codes for the same thing, so do the different word processors' internal formats - which is why you cannot load a Word Perfect file directly into Quill, or probably any other QL word processor, even if you have already managed to transfer it onto a QL disk.

You can use your QL to examine a word processor file and work out what the internal codes are. If you have a Minerva rom chip you simply "COPY filename TO SCR" and all the control codes will appear as identifiable symbols - if you can remember what they all are! Alternatively, type in and run Listing two; this does a similar job, but presents each control code as its Ascii code, highlighted for emphasis and preceded by a space to separate consecutive codes. Since the codes corresponding to the QL second character set may well also be control codes, they are highlighted too. (You can easily modify the program so that it prints these as their Ascii values rather than as the characters. Just omit line 240.)

If you make a test _doc file with Quill, incorporating the typestyle changes at easily identifiable points you will find that, for example, Ascii 15 to 18 are used to toggle on and off bold, underline, low and high

scripts respectively, that TAB is Ascii 09 (standard) and the end of paragraph marker is Ascii 0. Note particularly that there is no end of line (EOL) marker in the text, this is sorted out on the fly by the screen driver, and inserted by the printer driver at the last minute when you print.

Psion import

The import facility in the Psion suite was designed to enable limited transfer of information between the four programs. They differ slightly: Quill is only able to deal with text in Ascii format, but it is possible to interchange numerical data among the other three as well. In fact the

accept this by pressing <Enter> it makes each Ascii line a separate paragraph, which is the way to add a SuperBasic listing to a Quill _doc; but for ordinary text press <P> for "by paragraph", this causes the routine to ignore EOL markers unless it meets two together when it inserts a new paragraph. It is also clever enough to recognise CR and LF alone or paired in either order as EOL markers, so MS-DOS files and Acorn BBC files can be imported without any trouble. (I wish the reverse were true, and that Quill could convert each paragraph into a single Ascii line, empty of EOL markers except at the paragraph breaks, for export. One attempt by a long-time

```

5 REMark          Listing 2
10 nm$=           "Code_revealer"
15 REMark (pd) hjc 1992.06.24 ver 1.1
20 REMark ~~~~~Main
25 Setup: Reveal_all: Finish: STOP
30 REMark ~~~~~Setup
100 DEFINE PROCEDURE
105 CLS: CSIZE 0,0: INK 4: PAPER 0
110 INPUT "Device & filename: ",n$
115 ch% = 3: OPEN IN#ch%,n$: REMark ch% unused
120 END DEFINE: REMark ~~~~~Reveal_all
200 DEFINE PROCEDURE
205 LOCAL k,k$,lp: CLS
210 REPEAT lp
215   IF EOF(#ch%): EXIT lp
220   k$=INKEY$(#ch%,-1): k=CODE(k$)
225   SELECT ON k
230     = 32 TO 127: PRINT k$;
235     = 10: PAPER 6: PRINT !k
240     = 127 TO 191: PAPER 6: PRINT k$;
245     = REMAINDER: PAPER 6: PRINT!k;
250 END SELECT: PAPER 0: END REPEAT lp
255 END DEFINE: REMark ~~~~~Finish
300 DEFINE PROCEDURE
305 CLOSE #ch%
310 END DEFINE: REMark ~~~~~

```

_exp files produced for importation into Quill are more or less straight Ascii files, oddly in MS-DOS rather than QL format. (This means they only contain the normal printable characters plus a few universally recognised control codes like LF (new line - CHR\$(10)), and CR (carriage return - CHR\$(13)). MS-DOS uses CR,LF as EOL marker while the QL uses LF alone.) But import balks at files full of control codes, such as Quill _doc files.

Since Ascii files do contain an EOL marker at the end of each line, the import routine in Quill isn't quite sure what to do with them, so it asks a typically obscure question, "by line", - without even a "?". If you

user resulted in 'single lines' - full of hidden EOLs, which popped out again one by one when we tried to reformat the file! But informed opinion so far is that Quill will not format a line long enough to contain a paragraph. - Ed.)

Format file

I think this is the source of David Drysdale's problems since he was importing text "by line" and not by paragraph. The formatting commands, MARGIN and JUSTIFY work by paragraph, and since in his importation each line was a separate paragraph no wonder he found formatting tedious. In fact if you import by

Howard Clase makes sense of other machines' files on their way to Quill.

```

5 REMark          Listing 3

10 nm$=          "Filter_Ctrls"
15 REMark (pd) hjc 1992.06.22   ver 1.1
20 REMark ~~~~~ Main
25 Setup: Filter_controls: Finish: STOP
30 REMark ~~~~~
100 DEFine PROCedure          Setup
105 LOCAL n$
110 CLS: INPUT "Device & file name:" \,n$
115 m$ = Psionise$(n$)
120 ch% = 3:          REMark uses ch% & ch%+1
125 OPEN NEW#ch%,m$: OPEN_IN#ch%+1,n$
130 PRINT "Line counter ..."
135 END DEFine : REMark ~~~~~
200 DEFine PROCedure          Filter_controls
205 LOCAL i%,k,k$,l,p,n%,p%,s%: i%=0: n%=0: s%=0
210 REPEAT lp
215 IF EOF(#ch%+1): EXIT lp
220 k$=INKEY$(#ch%+1,-1): k=CODE(k$):i%=i%+1
225 SELEct ON k
230 =33 TO 127: PRINT#ch%,k$;: s%=0
235 =32 : IF NOT s%
240 PRINT#ch%,k$;: s%=1
245 REMark New line after 55+ chars
250 IF i%>55: Eol 0
255 END IF
260 =10,13: Eol 1
265 END SELEct : END REPEAT lp
270 END DEFine : REMark ~~~~~
300 DEFine FuNction          Psionise$(n$)
305 LOCAL p,m$
310 p$="" INSTR(n$(6 TO LEN(n$)))
315 IF p$: m$=n$(1 TO p%+4): ELSE m$=n$
320 IF LEN(m$)>13:m$=m$(1 TO 13)
325 RETurn m$&"_psi"
330 END DEFine : REMark ~~~~~
400 DEFine PROCedure          Eol(f%)
405 IF f%: PRINT#ch%,k$;: ELSE PRINT#ch%,CHR$(10);
410 REMark Force a new paragraph every 55 lines
415 IF n%>55: PRINT#ch%: n%=0
420 i%=0: s%=0: n%=n%+1
425 AT 3,17: CLS 4: PRINT n%
430 END DEFine : REMark ~~~~~
500 DEFine PROCedure          Finish
505 BEEP 5000,25
510 CLOSE#ch%: CLOSE#ch%+1
515 PRINT "Control characters removed."""
520 PRINT "New file name: "&m$
525 END DEFine : REMark ~~~~~

```

paragraph and then go straight to the top of the imported section you will find that any changes to margins or justification will carry through right to the end of the file, or to the next point where you have already reset margins or justification if that comes first. The program "Filter_ctrls" given in listing 3 will filter out all control codes but the couple mentioned above from any file. I've tried it on all the types of file that I can think of - even a _doc file, and the results have always been readily importable into Quill. In addition to filtering out control codes (230 - 260) it removes multiple spaces (235 - 240), adds an EOL marker after the first word that takes the line length past 55 characters (250), and arbitrarily adds a new paragraph every 55 lines (415). This is because Quill has a maximum paragraph length (roughly a page of ordinary text), and refuses to import files that exceed this. There is a procedure (300) to produce a file name for the output which conforms to the

Psion standard of a maximum of eight letters followed by an extension of not more than three characters. The extension doesn't have to be _exp, that's just the default, so I have used _psi. Change it to _exp if you would rather not type the extension in when importing.

While the main purpose of "Filter_ctrls" is to enable the importation of text files from "foreign" word processors, it could also be used with a corrupted quill _doc file, or even a def_tmp file in emergency recovery situations. There is no need to use it on a SuperBasic listing if you want to include one in some text, in fact the multiple space removal facility would remove all your structure indentations. The only requirement for importing a listing is that the name must conform to the Psion standard and you may have to rename it (or LOAD and reSAVE it under an appropriate name - "myprog_bas", where "myprog" doesn't exceed eight characters would be fine.) When you have imported

your text a certain amount of tidying up will probably be necessary. The cursor will be at the end of the imported material so the first thing to do is to move it to the beginning (this will only be the "TOP" of the document if you started with a clean slate.)

Margins, etc.

You should then find that the text is left justified and both the left and indent margins are set at the extreme left hand column. The right margin should be in its normal position in column 70 if you have imported the output file from "Filter_ctrls"; the position seems to depend to some extent on the line length of the imported file, which is why I built in the 55 - 60 character maximum; without it I found some files imported with the right margin in column 160! This is quite independent of the margins and justification of any text that is already present. If you then move the left and indent margins to columns 10 and 15 respectively and set right justification you will find that the whole of your imported text is now in the Quill default format. You will then have to remove the "false" new paragraphs, and if necessary insert "true" ones (if you have been recovering a lost Quill _doc you will find that all paragraph information has been lost, and there is some rubbish at the beginning and end of the passage.)

(In importing text for direct entry to a typesetting system, *QL World* has the opposite problem: for both style and technical reasons, they completely reformat imported text, and want Ascii text files free of all control codes apart from paragraph breaks and listing-indentations.)

Since both "Code_revealer" and "Filter_controls" work through the file byte by byte they are relatively slow in operation. When using SELEct ON loops it is a good idea to start with the most likely event and end with the least likely - reversing the order in Filter_ctrls added 30% to the time of operation. I have used integer variables wherever possible since they are faster

on my Minerva rom, but if you have one of the Sinclair roms then it won't make any difference and you can omit all % signs. It is, of course, well worthwhile compiling these programs if you are likely to be using them often.

I have solved the problem of using more than one printer driver (printer_dat) file with the same Psion program by giving each a distinctive name, COPYing the driver to ram8_printer_dat as required and configuring Quill and Abacus to look for it there. (You can change drivers in mid session by using the backup command.) This means that I have half a dozen or so differently-named _dat files on each disk.

Some time ago, trying to work out how to wire up a QL to an Acorn BBC so that I could transfer files via their RS232 ports, I zapped ser1 on one of my QLs (or at any rate the handshaking part of it. That'll teach me to mess about with hardware!) So now I have one QL that prints from ser1 and another that uses ser2. Changing the serial port on a printer driver via install_bas is cumbersome, to say the least, so I wrote a small SuperBasic utility which sets the serial port on all _dat files on a device in one short operation. This depends upon the fact that the port is indicated by byte 16 of the printer_dat file, the one immediately following the 10 bytes set aside for the printer driver name. You can use "Code_revealer" to check on this. (Oddly, although install_bas will accept a name of up to 15 characters, only the first 10 appear in the code). Sensibly enough byte 16 is \$01 for ser1 and \$02 for ser2. It is important to use the correct port, because otherwise the Psion programs lock up and you have to reset the machine, losing anything in progress.

Which device?

The program is given in listing four. You are first asked which device your _dat files are on; at line 140 the program calls a standard function I use to check that a valid device name is typed in (Get_dev\$, 410 - 510) - this will add the

underscore if you leave it out (460) - and checks the device name against the list in p\$ (480). If your device is not in the list, add it (420). While the PROCEDURE checks that the name is a valid Qdos device name there is no way it can check that you actually have the device hooked up, so you can generate a system error by putting in hdk1 when you don't have a hard disk! But it will trap typing errors of the type fpl2_, mdv22, etc.

There are of course only two serial ports so only "1" or "2" will pass the test in the loop 120 - 135; press the right key if you don't want a raspberry (130). This character, a\$, is passed to the PROCEDURE Change_ports and coerced into an integer as n%; the other parameter, dev\$ => d\$, is the device name. The directory of the device is put into a temporary file on the device itself (210 - 215) - so you will need a bit of spare room on it. The names are then read one by one from the temporary file (230) and if they end in _dat (240) but are not

"install_dat" (245) (that's the master file and we don't want to alter that!) the _dat file is OPENed and its name is printed onto the screen (250), the necessary change is carried out to byte 16 (255), and the file is closed (260).

(Since the pointer counts from zero not one it has to be set at 15 to change byte 16! For more info on the non-standard use of SCROLL to move the file pointer see Simon Goodwin's article in QL World February 1989.)

At the end of the list of files you EXIT the loop "change", CLOSE and DELETE the temporary file (270), and get a final message (405, 410).

Conclusion

I hope that some of these routines will be of use as they stand, inspire you to adapt them, or write original SuperBasic utilities of your own. Remember, you cannot break your computer by typing words into it; but don't forget restrict your experimentation to backups.

5 REMark

Listing 4

```

10 nm$="Change_serial_port"
15 REMark (pd) hjc 1992.06.23 version 1.1
20 REMark ~~~~~Main
25 Setup: Change_ports a$,dev$: Finish: STOP
30 REMark ~~~~~Setup
100 DEFine PROCEDURE
105 CLS
110 dev$=Get_dev$("Device containing _dat files")
115 PRINT"Serial port required (1 or 2)";
120 REPEAT loop
125   a$=INKEY$(-1): IF a$ INSTR("12"):EXIT loop
130   BEEP 3000,25
135 END REPEAT loop: PRINT\,a$\
140 END DEFine : REMark ~~~~~Change_ports(n%,d$)
200 DEFine PROCEDURE
205 LOCAL a$,change,L%,t$: t$=d$+"temp"
210 DELETE t$: OPEN NEW#3,t$: DIR#3,d$
215 CLOSE#3: OPEN_IN#3,t$
220 REPEAT change
225   IF EOF(#3): EXIT change
230   INPUT#3,a$: L%=LEN(a$)
235   IF L%>4
240     IF a$(L%-3 TO L%)="_dat"
245       IF NOT a$="install_dat"
250         OPEN#4,d$&a$: PRINT,a$
255         SCROLL#4,15,42: PRINT#4,CHR$(n%);
260         CLOSE#4
265   END IF : END IF : END IF
270 END REPEAT change: CLOSE#3: DELETE t$
275 END DEFine : REMark ~~~~~Get_dev$(d$)
300 DEFine FuNction
305 LOCAL f$,lp,p$: p$="mdv\flp\fdk\hdk\ram"
310 REPEAT lp
315   INPUT(d$&"-")\,f$: L%=LEN(f$)
320   IF L%=4 OR L%=5
325     IF LEN(f$)=4: f$=f$&"-": ELSE IF f$(5)="_"
330       IF f$(4)INSTR("12345678")
335         IF f$(1 TO 3) INSTR(p$): EXIT lp
340   END IF : END IF : END IF
345   BEEP 3000,25: PRINT
350 END REPEAT lp: RETURN f$: END DEFine
355 END DEFine : REMark ~~~~~Finish
400 DEFine PROCEDURE
405 PRINT\ "All _dat files on "&dev$;
410 PRINT\ " set to ser"&a$
415 END DEFine : REMark ~~~~~

```

C.G.H. SERVICES

CWM GWEN HALL, PENCADER, DYFED, CYMRU, SA39 9HA
(TEL 0559 - 384574)

COMMERCIAL SOFTWARE

PRICES INCLUDE P & P IN THE U.K.

PLEASE ADD 10% FOR EUROPE, 20% FOR THE REST OF THE WORLD
PAYMENT IN STERLING PLEASE
(GERMAN AND CANADIAN CASH ACCEPTED)

ANELPUM QUAT (NICK WARD) (text adventure) (128k) (fip/mdv) £10.00
ASSAULT AND BATTERY (DAMON CHAPLIN) (shoot 'em up) (128k) (fip/mdv) £12.50
ASTRO (NICK WARD) (astrology prog) (128k) (fip/mdv) £12.50
THE FLAG2 (TONY WOOLCOCK) (text adventure) (256k) (fip/mdv) £10.00
D-DAY MKII (DDC & RICH MELLOR) (wargame) (256k) (fip) £15.00
DOUBLE BLOCK (FRANCOIS LANCAULT) (arcade game) (128k) (fip/mdv) £10.00
DREAMLANDS (JEAN-YVES ROUFFIAC) (text adventure) (256k) (fip) £10.00
FIVE GAMES PACK 1 (WREDFORD DAVIES) (mind games) (128k) (fip) £12.50
FRACTALS FROM NEWTON'S POLYNOMIAL METHOD (JOHN TOPHAM) (fractals) (128k+) (fip/mdv) £12.50
FROM THE TOWER OF VALAGON (ALAN PEMBERTON) (text adventure) (128k) (fip/mdv) £10.00
GEE-GEE SYSTEM (PHIL JONES AND ANDY CSERBAKOL) (race predictor) (128k) (fip/mdv) £10.00
GREY WOLF (OLIVER NEEF) (u-boat simulator) (256k) (fip) £10.00
HERE WE GO (PHIL JONES AND ANDY CSERBAKOL) (text adventure) (128k) (fip/mdv) £10.00
ITALIAN LANGUAGE REVISION PACK (MIKE EDWARDS) (Education) (256k+) (fip) £12.50
MACSPORAN'S LAMENT (DAVE WATSON) (illustrated text adventure) (128k) (fip/mdv) £10.00
OPEN GOLF (OLIVER NEEF) (golf simulator) (384k) (fip) £12.50
ORBITING STARS (JOHN TOPHAM) (astronomical simulator) (128/256k) (fip/mdv) £10.00
PERSONAL FINANCE MANAGER (JASON VICINANZA) (budget system) (128k) (fip/mdv) £10.00
POLYTEXT (NICK WARD) (multi-column quill) (128/256k) (fip/mdv) £17.50
PUDGE (DAMON CHAPLIN) (arcade game) (256k) (fip/mdv) £12.50
QUICK MANDEL.BROT (KENNETH MURRAY) (fractals) (128k) (fip/mdv) £10.00

QUICK MANDEL.BROT II (KENNETH MURRAY AND RICH MELLOR) (fractals) (128k) (fip/mdv) £12.50
QUICK MANDEL.BROT III (KENNETH MURRAY AND RICH MELLOR) (fractals) (256k) (fip/mdv) £15.00
QUIZMASTER (PHIL JONES AND ANDY CSERBAKOL) (quiz game) (128k) (fip/mdv) £10.00
QUIZMASTER II (AS ABOVE & RICH MELLOR) (quiz game + module options) (128k) (fip/mdv) £12.50
RETURN TO EDEN (OLIVER NEEF) (role-playing illustrated adventure) (256k) (fip) £17.50
ROCK FALL (ANDREW TOONE) (Boulderdash clone) (128k) (fip/mdv) £10.00
SCRIPTWRITER (ANDY PRITCHARD) (TV/Film Script text processor) (128k+) (fip/mdv) £12.50
SECTOR X (HORST SPIELING) (shoot 'em up) (256k) (fip) £12.50 (mdv) £15.00 (Not for Gold Card owners!)

UPGRADES TO C.G.H. SERVICES SOFTWARE

Simply send the master disk and the difference in price between the versions and we'll send the latest version to you. If it is the same price, just send the master disk and an a.s.a.

Telephone: 0753-888866
Fax: 0753-887149

(EEC) W.N. Richardson & Co.

SINCLAIR QL PRICE LIST SEPTEMBER '92

18-21, Melbourne House,
Chiswick Hill,
Chiswick, SL9 8UE

QL Computers

All Prices Include 17.5% VAT

IS COMPLETE 6 Months Warranty, QL Computer, PSU, Prison Software (Quill, Archive, Abacus & Base) £125.00
Free one year membership to QUANTA, the independent QL User Group with over 400 library programs, advice etc.

PART EXCHANGE A part exchange allowance of £30 is available against the above. WITH JS ROM £ 90.00
JM BACKUP Includes QL Computer and PSU only £ 80.00
Tastemans Special £49 (Please enquire for further details)

Accessories * NOTE: EXTERNAL (SER2) 3 BUTTON MOUSE AND SOFTWARE WITH EXTRA FUNCTIONS. NOW HERMES COMPATIBLE *

PC KEYBOARD INTERFACE, INTERNAL FITTING, FOR FITTING 102 KEY KEYBOARD (Quanta £5 off) £ 75.00
PC KEYBOARD, UK version, 102 key (AT) £ 25.00
PC KEYBOARD INTERFACE AND KEYBOARD (£10 off) £ 90.00
CASH AND LEAD FOR EXTERNAL FITTING of Keyboard Interface £ 17.00
JOYSTICK with QL lead (no interface required) £ 12.00
* QL MOUSE, 3 Button, Software controlled, externally mounted, simply fits in SER2 £45 REMOTE MOUSE £ 65.00
MOUSE for Quill interface, also OK for Atari ST and Amiga £ 15.00

Disk Drives THE UNIVERSAL DRIVES ARE ALSO SUITABLE FOR ACORN BBC, ATARI ST, AMIGA, SPECTRUM, IBM, AMSTRAD AND OTHER PC COMPATIBLES

Universal 3.5" 1Mb disk drive, cased with PSU and free QL lead £ 70.00 2 Units for dual drive £130.00
Universal 3.5" 2Mb disk drive, as above but 2Mb capacity £ 90.00 2 Units for dual drive £170.00
3.5" 1Mb Uncased disk drive (CITIZEN) £ 25.00
3.5" 2Mb Uncased disk drive (CITIZEN) £ 40.00
Lead for uncased disk drive, or other universal micro £10.00 POWER SUPPLY FOR UNCASSED DRIVES £ 6.00

Parallel Printers EPSON/STC LX800, 180 cps, 25 cps NLB, With QL install instructions £129.00
CENTRONICS PARALLEL Printer Interface for above printer £ 27.00
QL LEAD FOR SERIAL PRINTERS £ 10.00

Monitors GOLDSTAR 14" HIGH RES EGA Colour, 0.31 Dot Pitch, 85 COLUMN IN STYLISH GREY WITH NON GLARE SCREEN £199
BUY NOW WHILE STOCKS LAST TILT & SWIVEL BASE £5

Microdrive Cartridges and Spares 4 New Cartridges in a wallet £ 12.00 8 peng carts for reformating in 2 wallets £ 15.00
Plastic Storage filing box including 20 new cartridges £ 55.00
QL Prison Software V2.35 Includes Quill, Abacus, Archive, and Base £ 20.00
QL Prison Software Separate programs £ 12.00

QL power Supply Unit £ 10.00 Membrane (and instructions) £ 9.50
TV or Network lead £ 3.00 QL Top & Bottom Case £ 6.00
IC's ZX £301 £ 9.00 ZX £302 £ 5.00 8049 (IPC) £ 6.00 MC 1377 £ 5.00
MC £406 £ 12.00

(Enquire for other spares and repairs)

Product subject to availability, E.O.E. Payment terms: Delivery: Carriage - £9
VISA Payment terms: Cheque - allow 10 days Passage - £3
FAX: 0753 887149

DIY Toolkit

Simon Goodwin explores the QL memory, with the latest DIY extension MAP in hand.

This project uses SuperBasic, with existing *Toolkit 2*, *DIY Toolkit* and *Turbo Toolkit* extensions, to develop a new MAP command that can answer many interesting questions about the state of a busy QL. SuperBasic code equivalents and Minerva and *Qliberator* tweaks are also discussed, so you should be able to get the program running on any Qdos-compatible system, from the basic 128K model to the latest ST or Amiga emulator.

MAP_BAS, listed here, is derived from MEMORY_HEAP_BAS, one of the utility programs in *DIY Toolkit Volume H*. MEMORY_HEAP_BAS has generated much interest among QL enthusiasts, because it can answer the classic computer user's question - where has all my memory gone?

Heaps

MAP_BAS demonstrates the general-purpose way that most QL memory is organised in 'heaps'. The code used to scan the Common Heap can just as easily be used to look through the Transient Program Area, occupied by QL tasks, as that uses an identical heap structure. It could easily be modified to scan the variable values in the SuperBasic heap, or user heap allocations made by the DIY Toolkit commands SET and ALTER.

Figure one shows the common heap map of a small QL system, with AH roms, 128K ram and Toolkit 2.07. The values may seem arbitrary at first, but you soon get to know the allocations in your own system, so that unexpected allocations stick out like a sore thumb.

The first heap entry corresponds to SuperBasic CON channel #0, used to display the start-up screen before F1 or F2, and later used for Basic command entry. The flag address points to the start of the Qdos channel table, where the ID for channel #0 is stored. The subsequent four areas are allocated by Toolkit 2 as it initialises itself.

Defaults

Next comes the area used to store Toolkit defaults for PROG_USE, DATA_USE and SPL_USE, followed by the device linkage block shared by MDV1 and MDV2. This is initially in rom but copied to the heap by Toolkit 2, in order to add hooks for rename and truncate operations.

The Toolkit allocates the next area to two links in the polled task list, which also begins in rom. The standard routine ensures that the keyboard and serial inputs are read regularly. 288 bytes are then used to link the extra network devices, NET (replacing the rom device), N (used by the file server) and NFS_USE.

Once the toolkit has finished, Qdos sets up SuperBasic channels #1 and #2, using 256 bytes each. Subsequent blocks are allocated as tasks run. The next block is a 160 byte file channel definition. In this case it was used to send the map to a remote device over the network; the same space is used when the BOOT file is loaded after you press F1 or F2.

Allocation

File-structured devices use three types of heap allocation. There is one device linkage block for each type of drive,

such as RAM, MDV, FLP or WIN. When a drive is accessed a further 'physical definition block' is created to keep track of all files open on that drive. Individual channels have their own definition blocks, created when they are opened.

Each microdrive needs 1072 bytes to store its map of sector usage and table of pending operations. This physical definition for drive MDV1 comes next, followed by the smaller block used for details of the N1 network 'drive', and the physical definition for MDV2.

Space that has once been allocated but since released is marked << FREE >> and you might consider using the DIY Toolkit INVERSE command to emphasise it even more.

Problems crop up when areas of free space are surrounded and split up by allocations around them. In the wrong place, even the smallest allocation of sixteen bytes can be enough to split a 400K free space into two chunks of less than 200K, restricting the maximum contiguous chunk of memory available for tasks, Basic, or program buffers.

Contiguous

Many programs need large contiguous areas to run. You may be forced to reset the computer to get rid of an

Figure 1 - Diy Toolkit MAP "SCB" report for "AH" QL memory

System Variables & tables occupy a fixed 3584 bytes.

COMMON HEAP MEMORY				
Start	Length	Link	Flag	Owner
167424	256	3242	166752	SuperBASIC
167680	128	1768	0	SuperBASIC
167808	80	1768	0	SuperBASIC
167888	80	1768	0	SuperBASIC
167968	288	1768	0	SuperBASIC
168256	256	3242	166756	SuperBASIC
168512	256	3242	166760	SuperBASIC
168768	160	168030	166764	SuperBASIC
168928	1072	0	0	SuperBASIC
170000	48	0	0	SuperBASIC
170048	1072	0	0	SuperBASIC
171120	912	0	0	<< FREE >>

"AH" SuperBasic occupies 12288 bytes, with 77824 more available.

Figure 2 - QL World DIY Toolkit MAP report for "JSL1" QL tasks

TRANSIENT PROGRAM MEMORY					
Start	Length	Job Base	Flag	Owner	Name
562176	480	0	0	<< FREE >>	
562656	10848	562760	0	SuperBASIC	MAP
573504	17600	573608	0	QLTurboQuill+	
591104	19056	591208	0	QLTurboQuill+	
610160	3536	610264	0	QLTurboQuill+	
613696	62016	613800	357806	SuperBASIC	QLTurboQuill+
675712	63104	675816	0	SuperBASIC	qlip72

allocation that splits your free space. This article explains how you can minimise that risk by understanding the way your QL uses its memory.

Chunks of free memory may appear in the transient program area when a task finishes, or in the common heap when a program releases memory or a channel is closed. Once allocated, an area cannot be moved as other parts of the system may contain pointers to it. MAP can locate and report on all allocations and free space in the task and common heaps.

You can also ask MAP to report on the memory used for SuperBasic, Resident extensions and System Variables. The current program does not look inside these areas, but extra code could easily be added, for instance to show the proportion used in each of the 13 dynamic areas within the SuperBasic space, or the utilisation of system variable areas.

Task map

Figure two shows the Task Heap map for the Minerva QL which I am using to write this article. As is usually the case, it is not possible to make an observation without disturbing the thing you are looking at; the compiled MAP command itself appears as the first active entry in the task map.

Task memory is allocated from high addresses, towards lower ones, unlike the common heap, which starts at low addresses after the system variables and Slave Block tables. The heap allocation code works just as well, but new space is added when necessary at the lowest address, by moving SuperBasic down towards the common heap, perhaps squeezing out some slave blocks in the middle.

First my BOOT program loaded QLIP72, the latest version of the multi-tasking *Qlipboard*. Later, I used *Taskforce* to load *TurboQuill+*, which created three more spaces in the task area for its own data storage. Finally the MAP command itself creates a task, as it runs, using the *Task Commander* code from *QL World* October 1991.

The information in this table is quite different from that shown by the usual JOBS or LIST_TASKS command. The owner of each area is shown by name, rather than by number. The memory used by each task is shown in bytes, with the start address, so you can PEEK and POKE inside the area if you're brave enough! The text buffer used by *Spy*, *The Editor* and *DevPac* is relatively easy to spot and PEEK. This can be a practical way to recover text from a crashed task, but the internal organisation of Psion programs is not for the faint-hearted.

The Utilities

TURBO_MAP_BAS is listed here. It is an ideal SuperBasic extension, itself written in SuperBasic. You can compile it

with Turbo or Qliberator, and convert the resultant task into a resident procedure with Task Commander, from *DIY Toolkit Volume J*.

The program illustrates how a channel and string parameter can be passed from SuperBasic to a Turbo task. Small changes allow the same for Qliberator, which uses #0 for the channel parameter, rather than #15, and the CMD\$ function in place of Turbo's OPTION_CMD\$.

TURBO_MAP_TASK, on the *DIY Toolkit* disk, is the same program, compiled to a little under 10K of stand-alone machine code. You can run this with EXEC, but you need Toolkit 2 or Turbo Toolkit to pass the channel parameter to it.

TURBO_MAP_CODE is the task file as treated by Task

Commander. This accepts a parameter string from SuperBasic - try MAP "?" if unsure of the usage - and also lets you nominate a channel, defaulting to #1 to suit USE, as usual. To send the task map to the file FLP1_TMAP, type:

```
OPEN_NEW
#3,"FLP1_TMAP" MAP #3,"T"
CLOSE #3
```

Subsequently you can look at the file with MORE TMAP or any Ascll editor, or print it with COPY to an appropriate device.

Memory analysis

The procedure COMMON_HEAP scans the common heap and shows all the memory areas inside. It prints five columns. First is the

```
100 REMark MAPS v 1.3 - TURBO version - uses #15
110 REMark QL World DIY Toolkit, PR Spink & SN Goodwin
120 REMark The next nine lines perform TURBO initialisation
130 :
140 DATA_AREA 1 :REMark 1K DATASPACE should be plenty
150 IF NOT COMPILED : OPEN #15,"SCR_480x210a0x0"
160 DIM t$(8) :REMark space for options
170 IF OPTION_CMD$=""
180   t$="*=CBT " :REMark Default for patching
190 ELSE
200   t$=OPTION_CMD$
210 END IF
220 :
230 IF t$="?" OR "H" INSTR t$
240   PRINT #15; "\MAP options are:"
250   PRINT #15; "\A for ALL details"
260   PRINT #15; "\B for SuperBASIC"
270   PRINT #15; "\C for COMMON HEAP"
280   PRINT #15; "\R for RESPR space"
290   PRINT #15; "\S for SYSTEM usage"
300   PRINT #15; "\T for TASK memory"
310   PRINT #15; "\? for this message"
320   PRINT #15; "\e.g. MAP #3,\"BT\" : STOP
330 END IF
340 IF "A" INSTR t$ THEN t$="SCBTR":REMark ALL
350 IF "S" INSTR t$
360   PRINT #15; "\System Variables & tables occupy a fixed!"
370   PRINT #15;!PEEK_L(SYSBASE+4)-SYSBASE!"bytes."
380 END IF
390 IF "C" INSTR t$ : COMMON_HEAP
400 IF "B" INSTR t$
410   PRINT #15; "\?;VER$;" SuperBasic occupies"!
420   PRINT #15;!PEEK_L(SYSBASE+20)-PEEK_L(SYSBASE+16)!"bytes, with"!
430   PRINT #15;!PEEK_L(SYSBASE+16)-PEEK_L(SYSBASE+12)!"more available."
440 END IF
450 IF "T" INSTR t$ : TASK_HEAP
460 IF "R" INSTR t$
470   PRINT #15; "\Resident procedures, functions and"! "devices occupy"!
480   PRINT #15;!PEEK_L(SYSBASE+32)-PEEK_L(SYSBASE+28)!"bytes."
490 END IF
495 CLOSE
500 :
510 DEFine PROCedure COMMON_HEAP
520   PRINT #15; "\TO 16;"COMMON HEAP MEMORY"
530   PRINT #15; "Start" TO 10;"Length" TO 20;"Link";
540   PRINT #15; TO 30;"Flag" TO 40; "Owner"
550   HEAP SYSBASE+4 , SYSBASE+12
560 END DEFine COMMON_HEAP
570 :
580 DEFine PROCedure TASK_HEAP
590   PRINT #15; "\TO 16;"TRANSIENT PROGRAM MEMORY"
600   PRINT #15; "Start" TO 10;"Length" TO 20;"Job base";
610   PRINT #15; TO 30;"Flag" TO 40; "Owner" TO 54; "Name"
620   HEAP SYSBASE+20 , SYSBASE+28
630 END DEFine TASK_HEAP
640 :
```


address of the start of the area, then the size in bytes.

The next two entries are linkage values from the heap header. If the heap entry is a channel definition, LINK points to the linkage block of the relevant device driver. This entry can be used to distinguish between channel allocations owned by different devices. The first such entry normally corresponds to SuperBasic channel #0. The same LINK value is used by other CON and SCR display device definitions elsewhere on the heap.

FLAG is the address of the entry in the system task or channel table pointing at this heap definition. When the channel is closed or the task terminates, the byte at FLAG is set, so Qdos knows that the memory is no longer active and does not try to use the channel or schedule the task any more. SV.CHBAS (SYSBASE+120) and SV.CHTOP (SYSBASE+124) point to the channel table, and if FLAG fits that range you are almost certainly looking at a channel definition block.

You can derive the Task or Channel number from the value of FLAG; subtract the address of the first entry in the table from SV_JBBAS or SV_CHBAS, and divide the result by four, the number of bytes used by each pointer in the table. The result is the Task or Channel Number, which forms the channel ID in conjunction with the Tag word at offset 16 in the heap entry.

LINK and FLAG

LINK and FLAG are important because they are used to control automatic allocations made by Qdos for tasks and channels. When heap space is allocated explicitly by programs their contents depend on the habits of that particular program.

You can normally spot memory allocated by ALCHP, ALLOCATION or RESERVE, as the same rom routine does the work in each case: MT.ALCHP, which puts characteristic values in LINK and FLAG. My AH-rom computer shows a link of 1768 for MT.ALCHP spaces, and 0 for memory allocated in

supervisor mode by the device vector MM.ALCHP.

The last column is the name of the task that owns the memory - often SuperBasic, for system utilities - or << FREE >> if the memory is unallocated. Often small free areas get left at the front of the heap, because subsequent requests ask for a larger space. Qdos and Argos merge consecutive free areas, sooner or later.

Directory device file definition blocks are 160 bytes long. CON channels with the full input buffer normally use 256 bytes of heap space. SCR channels use less, as they lack the input queue; on my QL, 112 bytes is normal, but this depends on the rom version. From JS onwards Sinclair added an extra long word at offset 100, at the end of the CON and SCR channel

variables.

Ramdisk

Areas of 544 bytes are used by the dynamic ram disk present in the QJump RAMPRT extension and the Thor rom. Every time a sector is needed, and not pre-formatted, the ram driver grabs 528 bytes - 512 for the sector data, and 16 for a list to tie the lumps together. The operating system adds another 16 bytes of common heap header, making 544 in all.

Pre-formatted ram disks are preferable, because they do not scatter allocations through the heap as they are used. Ram drives take 32 bytes each, plus 528 bytes for each sector, so a 100 sector (50K) ram disk needs 52832 bytes. It can store up to 50624 bytes, after allowing one sector for the directory and 64 bytes for a file

header. These figures are correct for RAMPRT but may differ for other ramdisk drivers. The same file would use 54400 bytes, in 100 separate allocations, on a dynamic ram disk.

FILL

Areas of 1040 bytes often correspond to the FILL buffers used by channels. These can be left in memory for ever if you accidentally CLOSE a channel after FILL 1 and before entering FILL 0. If you are sure that they are unused, you can remove them safely with Turbo Toolkit's DEALLOCATE procedure; you could use DISCARD if you POKE the magic word 'bufa' into the last long word of the heap header, usually 12 bytes on from the start address shown by MAP, which includes the 16 byte

```

650 DEFINE PROCEDURE HEAP(startp,nextp)
660 LOCAL length,address,jobtag,jobnum,addset,start,free_ptr
670 REMark List heap blocks and indicate ownership
680 :
690 start = PEEK_L(startp) : REMark first block
700 free_ptr = NEXT_FREE(startp) : REMark first free block
710 :
720 REPEAT scan
730 IF start >= PEEK_L(nextp): EXIT scan
740 length = PEEK_L(start)
750 address = PEEK_L(start+4)
760 jobtag = PEEK_W(start+8)
770 jobnum = PEEK_W(start+10)
780 addset = PEEK_L(start+12)
790 :
800 REMark is this block free
810 IF start = free_ptr
820 PRINT #15; start; TO 10; length; TO 20; address; TO 40; "<< FREE >>"
830 free_ptr = NEXT_FREE(free_ptr) : REMark Find next free block
840 ELSE
850 PRINT #15; start; TO 10; length; TO 20; address; TO 30; addset; TO 40;
860 REMark Name of owner of area
870 PRINT #15; JOB_NAME$(jobnum,jobtag);
880 REMark This should only be true for the transient program area
890 IF PEEK_W(start+110) = 19195
900 REMark Name of job
910 PRINT #15; TO 54;PEEK$(start+114,PEEK_W(start+112));
920 END IF
930 PRINT #15
940 END IF
950 start = start + length : REMark Find start of next block
960 END REPEAT scan
970 END DEFINE HEAP
980 :
990 DEFINE FUNCTION NEXT_FREE(start)
1000 REMark Find next free space in common heap
1010 REMark start = address of the start of a free block
1020 IF PEEK_L(start)= 0
1030 REMark End of linked list
1040 RETURN 0
1050 ELSE
1060 REMark return start of next free block
1070 RETURN start+PEEK_L(start+4)
1080 END IF
1090 END DEFINE NEXT_FREE
1100 :
1110 DEFINE FUNCTION JOB_NAME$(num,tag)
1120 IF num = 0
1130 RETURN "SuperBASIC"
1140 ELSE
1150 sv_chbas = PEEK_L(SYSBASE+104)
1160 jb_ptr = sv_chbas+(num*4)
1170 REMark Is this job number in use ?
1180 IF PEEK(jb_ptr) <> 255
1190 jb_start = PEEK_L(jb_ptr)
1200 REMark Is the tag correct ?
1210 IF tag = PEEK_W(jb_start+16)

```

header.

The QFLP disk system allocates 1616 bytes for each 720K drive that has been used, unless you stop using the drive and de-allocate the space with the Toolkit 2 command DEL_DEFB. Most of this space, from offset 80 onwards, is a copy of the medium header and disk map from the first block of the disk. The first section notes the number of files open (0-255), error status and details of up to 20 pending operations.

Unfortunately there is not enough space here to note all the contents of disk and microdrive system heap allocations. DIY Toolkit Volume H now contains a comprehensive list of heap variables used by QL and Thor directory devices. The file OFFSETS_DOC gives the labels, offsets, sizes and details of each part of the standard heap allocations for drives, file channels and devices.

In use

Until you learn how your system treats the heap, MAP may be more useful for diagnosing problems than it is for solving them. It shows how your memory has become fragmented, in the hope that you can avoid causing the same problem in another session. It can also be very useful when debugging new programs that use the heap.

Memory is allocated whenever a drive is used for the first time, so it is a good idea to DIR all relevant drives, and especially 'data drives' like MDV2, FLP2 or RAM1, before loading tasks, so that the drive details are stored before the task ones, where they are less likely to cause fragmentation.

Ramdisks should be formatted before use, and preferably before files are opened or tasks loaded. If an area is owned by a task it will be released when the task terminates, or you stop it with PURGE, REMOVE, RJOB or REMOVE_TASK.

Sometimes the Toolkit 2 command DEL_DEFB helps, by de-allocating the definition blocks, but that's a cautious command and makes many checks for open files and other

possible problems. Often it decides to do nothing. If blocks are deleted they will re-appear in the first heap space big enough to hold them when the drive concerned is next used.

Another useful utility in DIY Toolkit Volume H is DEVLISTS_BAS, which scans through the system device lists, printing crucial addresses used by each device driver on your system. You may be surprised to see how many of these exist! The *Sinclair QDOS Companion*, by Andy Pennell, explains more about these values and lists.

DIR_DEVS shows entries for all the Directory devices, like FLP, RAM and MDV, while SER_DEVS scans for serial devices like SER, MEM, NET and CON. Notice how the addresses correspond to values shown by MAP and MEMORY_HEAP_BAS.

Compatability

The program listed starts with a few lines aimed at the Turbo compiler. DATA_AREA 1 reserves the minimum 1K dataspace; alternatively you can do this from the compiler front panel or later with the DATASPACE_TASK utility. If running the program in SuperBasic, you need to open a screen channel with OPEN #15,"SCR_480x210a32x0" and set T\$ to contain letters indicating the reports required. The default is "CBT", for Common heap, Basic and Tasks, but you can easily

change this, even after compilation, by patching the text that starts " *= ".

Most of the work is done by PROC HEAP, which scans a heap indicating the ownership of each block. NEXT_FREE is used to locate the next block in the linked list of free spaces.

The last three DEFINITIONS may be replaced with toolkit code. If you have Toolkit 2 you can save yourself typing by replacing the call to the SuperBasic function JOB_NAME\$, at line 870, with the Toolkit function JOB\$, which expects the same parameters but returns nothing for SuperBasic and nameless tasks.

MAP_BAS assumes that system variables are at address 163840, and may need tweaks to run on obscure systems such as the Thor 20. Dual-screen Minerva is supported, as the program checks for VER\$ "JSL1" and uses the extra Minerva parameter VER\$(-2) to find the system variables. For maximum reliability, use the DIY Toolkit SYSBASE function rather than the SuperBasic version.

PEEK\$

The ubiquitous PEEK\$ function is written out here in slow SuperBasic. Equivalent but much faster code is implemented in Turbo Toolkit and other extensions, such as the CGH and Quanta library toolkits. Turbo compiles PEEK\$

directly into a call to its own run-time system, so the PEEK\$ extension is not needed to run the compiled task. You should not use the SuperBasic function if a code version is available.

To save yourself yet more typing, and possible debugging, you can get the whole lot ready-compiled on disk. The SuperBasic, compiled task and resident procedure code for MAP appears in DIY Toolkit Volume H, along with heap extensions, device offsets, documentation and source for RESERVE, DISCARD and LINKUP, plus the original MEMORY_HEAP_BAS, DEVLISTS_BAS, and a set of stopwatch timing commands and functions introduced in QL World, May 1989.

DIY Toolkit volumes cost three pounds each, on our 3.5 or 5.25 inch disks or your cartridges (one per volume), plus four pounds per order for processing, so it pays to order several volumes at once. Write to DIY Toolkit, Cwm Gwen Hall, Pencader, Dyfed Cymru, SA39 9HA, or call Richard Alexander on 0559 384574 to place an order or obtain more details.

As ever I am grateful for ideas from readers, and welcome your suggestions and comments on past and future DIY Toolkit projects. Please write to me, care of Sinclair QL World, if there is anything new and useful that you would like to see implemented as a QL extension.

```
1220      REMark Is that an Ident Word (19195 = $4AFB) ?
1230      IF PEEK_W(jb_start+110) = 19195
1240          RETURN PEEK$(jb_start+114,PEEK_W(jb_start+112))
1250      ELSE
1260          RETURN "No Name"
1270      END IF
1280  END IF
1290  END IF
1300      RETURN "** Not Valid"
1310  END IF
1320  END DEFINITION JOB_NAME$
1330 :
1340  DEFINITION FUNCTION SYSBASE
1350  REMark Redundant if you have the DIY Toolkit equivalent
1360  IF VER$="JSL1"
1370      RETURN VER$(-2):REMARK Locate Minerva system variables
1380  ELSE
1390      RETURN 163840
1400  END IF
1410  END DEFINITION SYSBASE
1420 :
1430  DEFINITION FUNCTION PEEK$(addr,len%)
1440  REMark Redundant if you have the Turbo Toolkit equivalent
1450  LOCAL p,t$
1460  t$=""
1470  FOR p=addr TO addr+len%-1
1480      t$=t$ & CHR$(PEEK(p))
1490  END FOR p
1500  RETURN t$
1510  END DEFINITION PEEK$
```

QMON

INFORMATION

Program: Qmon II (2.05)

Publisher: Digital Precision Ltd., 222

The Avenue, Chingford, London

E4 9SE. Tel: 081 527 5493.

Price: £39.95 (disk or mdv) plus 5% Europe, 10% to Rest of World.

QMON was originally sold by Qjump, the firm run by one of the QL's main designers, Tony Tebby. Having moved to France, Tony has now arranged for this program to be re-released by Digital Precision in this new version (unfortunately there is currently no discount for users of the old version). Updates have mainly taken the form of ensuring that Qmon can be used in Minerva's two-screen mode, and also improvements for use in the Pointer Environment. There is however some suggestion that old versions of Qmon had trouble working on the Thor XVI, and it is not known whether this new version will now work on this.

Qmon II is a program for monitoring and debugging machine code programs and machine code SuperBasic

extensions. It allows you to see machine code programs in action, examine their registers and code, and even alter parts of a program as it runs.

Manual help

The program is supplied with a comprehensive A4 manual (which users new to machine code may find hard to understand, although the package is not really aimed at inexperienced machine code users) and a disk or microdrive containing the program and various demonstration files. The manual itself is not very different from the one originally supplied by Qjump. As with most of DP's manuals, it is more than adequate. It takes you through the demonstration files step-by-step, giving you an idea what Qmon is capable of, both in Mode4 and Mode8.

To load the program, you can either use *Toolkit II's* LRESPR, or the supplied boot program. Once loaded, there are two main ways in which you can invoke Qmon. If you wish to monitor a task, it is best to use the form 'QMON #3,flp2_named_task' (oddly enough for one of Tony's programs, this form does not currently support default directories, and so the full file name must be supplied). This proceeds to set up the given task file and then immediately returns control to Qmon so

that you can monitor the task's progress.


In this form, you can still use SuperBasic by pressing Ctrl-Space and then Ctrl-C. However, you may find that unless you have the pointer environment present, if you remove the task from memory other than from within the task itself (eg using RJOB), Qmon leaves a little cursor present on screen, which although it will not allow anything to be typed, slows down task switching as you will need to Ctrl-C through this as well. The pointer environment does however also create other problems as you may find that you cannot access SuperBasic while Qmon's cursor is active. When the program which is being monitored is removed, Qmon has no further effect until it is invoked again with the command QMON.

Short commands

The other main way of invoking Qmon is to use the command QMON #ch, which attaches Qmon to the QL operating system. This means that Qmon will trap many different types of processor exceptions (such as Address Errors) and allow the user to regain control of the system (and possibly alter the offending machine code instruction) rather than resulting in a system crash.

Once invoked, Qmon prints the prompt 'Qmon >' to the

Tony Tebby's QMon has been updated, and republished by Digital Precision. Rich Mellor assess the new version.

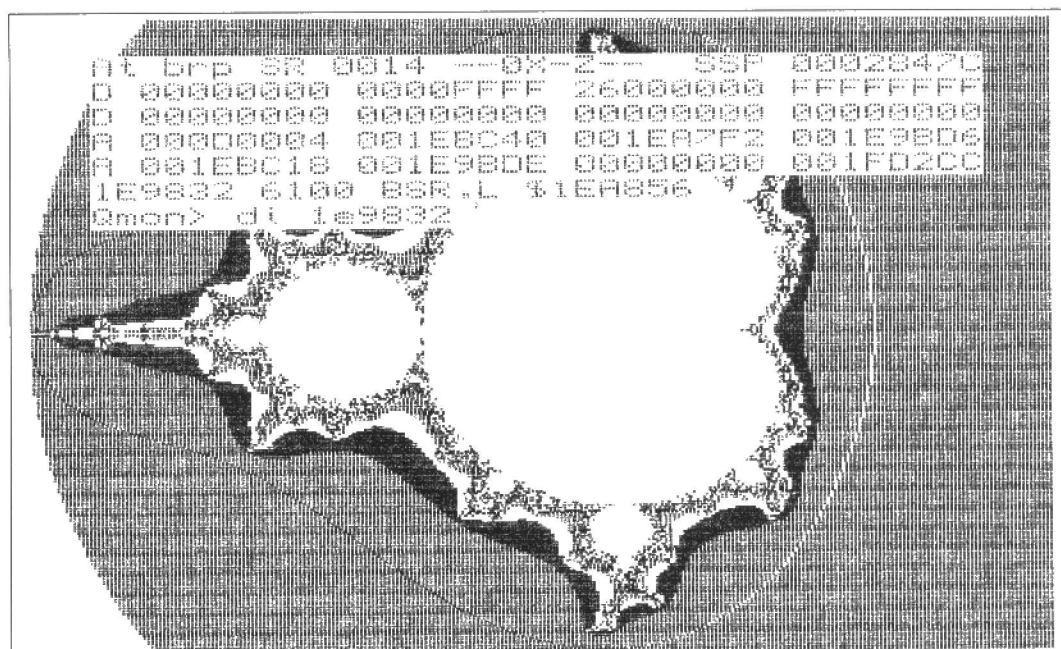

given channel. You will need to type in short commands (normally one or two letters followed by various numerical parameters) to get Qmon to do anything. Qmon provides an extremely wide range of facilities for you to monitor machine code programs. Break points may be set either in rom or ram by using the command B address. When a break point is encountered while any program is running, the current program will be stopped and control returned to Qmon to allow you to inspect the machine code registers and much more. You can also disassemble parts of memory, and there is even a small line assembler included which allows you to alter given machine code instructions. If you are using a part of memory which has been set aside to be used as data, this can be displayed in both hexadecimal and Ascii, and you can then alter its value to test certain situations.

Running trace

Other commands allow you to trace a program as it runs, either stopping every time that an instruction is executed, or only every so many lines. These trace instructions can even be used to allow a

1119/1440 sectors Device is Read/Write 1992 Jul 18 17:07:46									
Us	Userno.								
Attr	RW Read/Write								
	RO ReadOnly								
	V Visible								
	H Hidden								
Vers	Version								
Name	Length	Attr	Us	Typ	Update date	Backup date	Vers	Space	
boot	835	RW	V	0	Dat	1992 Jul 18 13:30:00	1961 Jan 01 00:00:00	1	0
Ptr_Gen	14638	RW	V	0	Dat	1992 Jun 27 14:08:00	1961 Jan 01 00:00:00	0	0
WMan	10126	RW	V	0	Dat	1992 Jun 27 14:08:01	1961 Jan 01 00:00:00	0	0
Hot_Rext	11772	RW	V	0	Dat	1992 Jun 27 14:08:03	1961 Jan 01 00:00:00	0	0
Config	7616	RW	V	0	Exe	1992 Jun 27 14:08:04	1961 Jan 01 00:00:00	0	4000
Config_English	6078	RW	V	0	Exe	1992 Jun 27 14:08:05	1961 Jan 01 00:00:00	0	1792
Hot_Rext_English	11684	RW	V	0	Dat	1992 Jun 27 14:08:07	1961 Jan 01 00:00:00	0	0
Ptr_Gen_Updates	912	RW	V	0	Dat	1992 Jun 27 14:08:07	1961 Jan 01 00:00:00	0	0
system_rext	16508	RW	V	0	Dat	1992 Jun 27 14:09:51	1961 Jan 01 00:00:00	1	0
System_Rext	4230	RW	V	0	Dat	1992 Jun 27 14:08:11	1961 Jan 01 00:00:00	0	0
SysAttr_Rext	5852	RW	V	0	Dat	1992 Jun 27 14:08:12	1961 Jan 01 00:00:00	0	0
IODev_Rext	1558	RW	V	0	Dat	1992 Jun 27 14:08:12	1961 Jan 01 00:00:00	0	0
QIMIDev_Rext	468	RW	V	0	Dat	1992 Jun 27 14:08:13	1961 Jan 01 00:00:00	0	0
KeyReset_Rext	430	RW	V	0	Dat	1992 Jun 27 14:08:13	1961 Jan 01 00:00:00	0	0
KeyRecall_Rext	364	RW	V	0	Dat	1992 Jun 27 14:08:13	1961 Jan 01 00:00:00	0	0
German_Tra	262	RW	V	0	Dat	1992 Jun 27 14:08:13	1961 Jan 01 00:00:00	0	0
English_Tra	262	RW	V	0	Dat	1992 Jun 27 14:08:14	1961 Jan 01 00:00:00	0	0
MakeROM_Bas	641	RW	V	0	Dat	1992 Jun 27 14:08:14	1961 Jan 01 00:00:00	0	0
MakeROM.Txt	807	RW	V	0	Dat	1992 Jun 27 14:08:14	1961 Jan 01 00:00:00	0	0
System_Dir_Bas	2169	RW	V	0	Dat	1992 Jun 27 14:08:15	1961 Jan 01 00:00:00	0	0
System Chan_Bas	1290	RW	V	0	Dat	1992 Jun 27 14:08:15	1961 Jan 01 00:00:00	0	0
System_Upper_Bas	388	RW	V	0	Dat	1992 Jun 27 14:08:15	1961 Jan 01 00:00:00	0	0
System_Mem_Info_Bas	703	RW	V	0	Dat	1992 Jun 27 14:08:16	1961 Jan 01 00:00:00	0	0
System_FLP_Info_Bas	744	RW	V	0	Dat	1992 Jun 27 14:08:16	1961 Jan 01 00:00:00	0	0
System_TRA.SET_Bas	490	RW	V	0	Dat	1992 Jun 27 14:08:16	1961 Jan 01 00:00:00	0	0
System_UserDir_Bas	1307	RW	V	0	Dat	1992 Jun 27 14:08:17	1961 Jan 01 00:00:00	0	0
For_C_IOAttr_Ase	743	RW	V	0	Dat	1992 Jun 27 14:08:17	1961 Jan 01 00:00:00	0	0
For_C_IOAttr_Rel	132	RW	V	0	Dat	1992 Jun 27 14:08:18	1961 Jan 01 00:00:00	0	0
HardTools_Fxt	340	RW	V	0	Dat	1992 Jun 27 14:08:18	1961 Jan 01 00:00:00	0	0
HardTools.Txt	282	RW	V	0	Dat	1992 Jun 27 14:08:18	1961 Jan 01 00:00:00	0	0
System_Updates.Txt	7757	RW	V	0	Dat	1992 Jun 27 14:09:19	1961 Jan 01 00:00:00	0	0
Ing_TEXT_ext	22360	RW	V	0	Exe	1992 Jul 18 13:27:05	1961 Jan 01 00:00:00	0	40%

as the program tends to 'lock up' when the interrupts are

Addresses can be entered into Qmon in various ways,

including by reference to the values of address registers used by the program, for example the command DI3 10(A1) 100 would disassemble one hundred instructions from the address contained at A1+10 onwards to Qmon's channel 3 (this enables Qmon's output to be sent to a printer or a disk). If you are not certain of the address required, Qmon also includes facilities to search in memory for either a set of bytes, a string of characters or even

a specific machine code instruction.

Complex tool

Qmon is an extremely complex piece of software

and in such a short review as this, I cannot hope to comment on all of the facilities provided by Qmon, which include exception processing, transient windows in which Qmon can appear without destroying the screen underneath Qmon's window; the facility to recall a set number of machine code instructions which have just taken place; and even a macro command allowing you to tell Qmon to carry out a set sequence of commands at certain points in a program.

As with any programming tool, there are always various features which programmers would like to see (for example, a means of storing addresses), but it can be guaranteed that Qmon will contain most (if not all) of the monitoring and debugging facilities that even the best machine code programmer could desire.

Example 1 - (see printout)

Example 2 - example of disassembly output of Qmon II

```

1E98C4 47FA LEA $1ED0CC(PC),A3
1E98C8 4281 CLR.L D1
1E98CA 3213 MOVE.W (A3),D1
1E98CC D7C1 ADDA.L D1,A3
1E98CE 247A MOVE.L $1E9744(PC),A2
1E98D2 223C MOVE.L #$1FFF,D1
1E98D8 24DB MOVE.L (A3)+,(A2)+
1E98DA 51C9 DBF D1,$1E98D8
1E98DE 7000 MOVEQ #$0,D0
1E98E0 4E75 RTS
1E98E2 45FA LEA $1E98EC(PC),A2
1E98E6 6100 BSR.L $1EA2CA
1E98EA 4E75 RTS

```

program to run as normal until a certain condition is met (or until a sub-routine returns). By using the LS command, you can even trace a program running in supervisor mode, although I have encountered some difficulties in using this,

disabled, or from within an SD.EXTOP machine code routine on my Minerva (1.91) rom. This may however be due to the fact that Minerva does not smash the trace flag on a TRAP #0 instruction.

QL-System

QL-System is designed as a software add-on to Toolkit II. Rich Mellor sizes it up.

INFORMATION
Program: QL-System
Publisher: Jurgen Falkenberg,
Thanweg 36, D-7539 Ersingen,
Germany.
Price: 78 DM + 20 DM (p&p) (approx £28). Add 15DM if not by Eurocheque. Disk only.

This toolkit is designed to act alongside Qjump's Toolkit II, and adds various additional facilities for disk and display handling to the QL.

The toolkit is supplied with various other miscellaneous programs to enhance the QL's facilities, together with an A5 manual in a plastic binder. The manual is quite well written, although it does tend to show its translation from the German in places and also fails to cover the additional programs supplied on the disk in any great detail (if at all). Although an index to the various commands is provided, in true *Toolkit II* style, this is by reference to the numbers of the sections of the manual. I have always found that page references are much easier to follow, but then I daresay there are pros and cons to both methods.

Two groups

The commands can be split into two groups: those dealing with disks and files; and those dealing with the Qdos system.

The toolkit is initiated by the command

```
a=RESPR(17408):LBYTES  
flp1_system_rext,a:CALL a.
```

The command `SYS_EXT` then links in the new commands and activates Toolkit II (if available). Although Toolkit II is not necessary to use the toolkit, it is advisable, as most of the commands require this to be present in order to work. Level-2 device drivers are also required by some of the commands - the index lists

which extensions are required for each command to work.

The set of file commands allow you to add various attributes to each file. The most unusual of these is the command `SET_FATTR`, which allows you to specify whether a file is to be read only, hidden altogether or only available to certain users. For example, `SET_FATTR \flp2_text,ru3` will make the file 'flp2_text' invisible to anyone other than user number 3, and in any case the file will be made read-only. The command `USER` allows you to alter the user number, which allows you to set up user areas, as only those files with either the same user number or a user number of zero will appear in directory listings or even be accessible (files are saved with the current user number).

Password

The toolkit also allows you to set up Supervisor files, by giving them the user number 63. Such files are only accessible if you enter the correct password (this can be configured), however, in version 1.16 this password does not work properly unless you use the default password (this should however be quite easy to fix).

Although this is a good idea, the password is not integrated into the file, which means that anyone with their own copy of QL-System can access that file by using their own password (machine code programmers may also find it quite easy to avoid entering the password). Also, these file attributes will only have any effect on a QL on which the QL-System is present, or at least the driver. Although a further two cut-down versions of the toolkit are included in the package, the manual does not say whether these may be freely distributed with commercial software which wants to make use of these user areas.

New Basic commands also allow you to read the current user number and file attributes, and there is also a wild card command to allow you to set attributes on several files at the same time (making it easier to set up user areas).

A new machine code TRAP #3 command is also included to enable these attributes to be set/read from machine code.

Device commands

Commands are also provided to allow you to check whether a given medium is write-protected (although this does not work with microdrives); together with commands to return the cluster size of a disk, the number of available and free clusters, the length of a file header, the drive number and original medium name (useful after `WIN_USE` commands), and the name given following a `FORMAT` command.

Other file commands require the presence of Level-2 device drivers (such as on the Gold Card), and generally echo commands provided on those device drivers, namely functions to set and read file backup-dates, version numbers and file updates. Gold Card users will have come across these already, although oddly, there are also wild card variants of these commands in this toolkit. Again machine code TRAP calls are also added to complement these commands.

Some users may also have noticed that although Toolkit II provides functions to read the file type, dataspace and extra information stored in a file's header, there is no way of setting this information. QL-System now includes the commands `SET_FTYPE`, `SET_FDATA` and `SET_FXTRA` to fill this gap (together with the associated wild card versions of these commands). Other commands allow you to produce alphabetical directories (`ADIR` and `ASTAT`) and also to set both the data default and program default at the same time (`DIR_USE`).

Qdos set

The Qdos system set of utilities include Job and Channel control commands; commands for using the pointer interface and the hotkey system; and general utilities.

The Job control commands

allows the same parameters as Toolkit II users will already have come across. QL-System however, provides commands which are sorely lacking from Toolkit II, namely commands to suspend Jobs and release them; and functions to return the identification number and start address of the given Job. Channel control commands will print out a full list of all currently open channels, together with the ID of the task which owns them; as well as allowing you to close any given channel from any task. Again, functions return the address of the channel definition block; Qdos channel identification number; number of bytes per screen line (useful for checking if a window has been opened in extended mode 4 on the ST-QL emulator); and much more.

If you intend writing a program which may be used under the pointer interface, a function is even provided to

check whether or not output on that channel is possible (ie whether it is at the top of a pile).

Pointer commands

Many of the pointer and hotkey interface commands make use of the various additional TRAPs provided by these systems, and include the ability to store windows, set the stuffer buffer and mouse speed, find Thing version numbers and find the outline limits of a given channel. Other facilities allow you to list all currently available devices, return the current screen mode and address of the system variables and even the current baud rate. Some of these commands are based upon similar commands which have appeared in *DIY Toolkit*, such as commands to SET and CHANGE absolute variables so that they can be used much as the PI function built

into the QL. Many of the other commands can be found in various public domain libraries, although it is always handy to have them all in one single toolkit.

Some undocumented Basic programs on the disk will provide full details about the contents of a disk, details of a given channel, details of memory usage, and link in a German translation table.

An updates file (sadly still in German) goes on to explain that the public domain file IODev_ext is also supplied on the disk, which adds named pipes, a nul device, and a MEM device to the standard QL setup. The file KeyReset_ext installs a small machine code task that resets the QL whenever the keys Ctrl-Alt-7 are pressed; and a couple of other files which I am not certain what they do... There is even a program included to make the toolkit rommable if you have access to an eeprom programmer.

Configured

Various parts of the toolkit can be configured using the standard CONFIG program supplied, enabling you to alter the size of the windows set when the WSET command is issued (similar to WMON/WTW). For those of you who do not have the pointer interface, the latest version is also included, although there is no documentation on this - for this you will need to purchase Qpac II or the Qptr manual (although I would recommend the former as an introduction to the package).

Overall, the toolkit contains lots of useful little goodies, but is perhaps slightly overpriced, as many similar commands can also be obtained from the public domain libraries. I would however have liked to compare the package with Toolkit III produced by Digital Precision, as I believe that this may also include similar utilities to the file attributes.

QUANTA

Independent QL/Thor Users Group

Worldwide Membership is by subscription only, and offers the following benefits:

- Monthly Newsletter - up to 40 pages
- Massive Software Library - mostly FREE!
- Free Helpline and Workshops
- Regional Sub-Groups. One near you?
- Advice on Software & Hardware problems
- Discounts from most major suppliers
- Subscription just £14 for UK members
- Overseas subscription £17

Barclaycard: Visa: Access: Mastercard

* Now in our NINTH successful year *

Further details from the Membership Secretary



Bill Newell
213 Manor Road
Benfleet
Essex. SS7 4JD
Tel (0268) 754 407



QUBBESoft P/D

38, Brunwin Road, Rayne, Braintree, Essex. CM7 5BU. Tel. 0376 347852

Public Domain & Shareware Software

C68 Compiler Runtimes (3 Disks) £3.00p
C68 Compiler Source Code (2 Disks) £2.00p
MicroEMACS V3.11 (2 Disks) £2.00p
SPEC1 Q.A.T.S.....£1.00p
SPEC2 Mol Graphics.....£1.00p
SPEC3 XLisp V1.4a.....£1.00p
SPEC4 QPacer.....£1.00p
SPEC5 C Tutorial.....£1.00p
SPEC6 Lib QPTR.....£1.00p
SPEC7 Lib CPORT.....£1.00p
SPEC8 Qractal Screens.....£1.00p
SPEC9 QL Home Finance.....£1.00p
SPEC10 ZMI+ Spectrum Emu£1.00p

PD Disks 1 to 11.....£1.00p each
(Each PD Disk contains 10 progs and a Menu Handler. Each prog can be RUN from the Menu.)

P&P PD & Shareware

Qty.	U.K.	Euro	Z1	Z2
1-3	£0.50	£1.00	£1.50	£1.75
4-6	£0.75	£1.50	£2.00	£2.25
7-9	£1.00	£2.00	£2.50	£2.75
10-12	£1.25	£2.50	£3.00	£3.25
13-15	£1.50	£3.00	£3.50	£3.75
16-18	£1.75	£3.50	£4.00	£4.25

Euro=All EEC & Scandinavian Countries
Z1=Middle Eastern, Nth & Sth America & Canada
Z2=Australia, New Zealand, Japan etc.

Payment Methods

Cheques (Drawn on British Bank), Postal Orders, International Postal Orders made payable to: QUBBESoft P/D

Eurocheques payable to: R.Dunnett

Cash in UK Pounds Sterling is also accepted.

Catalogue

S.A.E. (A5 Size) or International Reply Coupon.

New QL Hardware

Trump Card:- 768K RAM, TK2, Disk Interface, Dynamic RAM Disk, A4 Manual. £95.00p

ExpanderRAM:- 512K of RAM with thru port £45.00p

ExpanderRAM:- 0K of RAM, as above except User supplies RAM chips. £20.00p

Twin 3.5in Disk Drives:- Fully cased with internal PSU, 720K per Drive. £100.00p

2nd User Hardware & Software

QL's (JS/JM).....From £45.00p

Disk Interfaces.....From £30.00p

Disk Drives (Twin).....From £75.00p

Printers.....From £55.00p

Monitors (Grn).....From £35.00p

Monitors (Colour).....From £75.00p

Used MDV's.....80p each

QL Related Books.....Half Price

QL World Back Iss.....75p each

QUANTA Back Iss.....40p each

Commercial Software including Games, Utilities, Front Ends, too many to list here.

All Prices Exclude P & P.
Please Ring for Details

PRINTER REPORT

Alex Munden set up shop with the Panasonic KX-P1080 many years ago, and still finds it suits his business.

The Panasonic KX-P1080 is not a new machine, having been superseded in 1987 by the 1081, which has also (recently) been superseded by the 1170. These are narrow-carriage, 9-pin models priced at under £200. The KX-P1080 still turns up on the second-hand market, and refurbished examples are occasionally available from well-established suppliers.

Eventually, I made the rash decision to start my own business, and it became apparent that I would need a 'professional' machine. Shortly afterwards, Sinclair reduced the price of the QL, and I decided to take the plunge. Two replacements later, I had a working system, with a black and white TV monitor, and a Brother M1009 for hardcopy.

Better output

As the business developed, I needed to improve the look of my output to Near Letter Quality. I found the Panasonic KX-1080 on prominent display in a shop window. Having solicited a demo of the

printout quality, and assured myself that ribbons and things were available, I waved a card and walked out with it.

The KX-P1080 is an Epson-compatible, 9-pin, 80-column dot matrix printer with a parallel interface as standard, although an optional RS232 serial board can be fitted. As I already had a Miracle Systems Centronics adaptor, the standard interface was sufficient, and it ran as soon as I plugged it in.

Draft output of 100 characters per second, and a somewhat slower 20 cps in NLQ mode, is adequate for my needs, and I am particularly impressed with the NLQ output. (So am I - Ed.) There are true descenders (the bits below the line in lowercase letters g,j,p,q and y) in all print modes, and printing is bi-directional - the print head works in both directions. It is also logic-seeking, skipping blank spaces at the beginning and ends of lines and between paragraphs. Print operation is not excessively noisy, although I would not volunteer a serious telephone conversation of any length with the printer running in the same room. It can be distracting.

Form widths

Friction and tractor feed come as standard, and are selected by a lever to the left of the casing. The friction feed sprockets are fully adjustable for different form widths, and also serve as a paper guide for cut sheets.

Physically it has a small(ish) footprint (403 by 286 by 115mm), although it requires more space if continuous forms are used, and it is solidly built at 6 kg. A wire frame paper guide is supplied for continuous stationery but there is no provision for a cut-sheet feeder.

Both the print mode selector switch and the paper feed switches are on top of the casing, and the dip switches for setting the machine's defaults, such as page length and character set, are reasonably accessible under a clear cover below the print

head guide bars. To the left of the platen the print head pressure lever to handle up to three sheets of paper.

The only available typeface is Courier, with type pitch sizes restricted to pica (10 cpi), elite (12 cpi), semi-compressed (15 cpi) and compressed (17 cpi). Elongated characters are also available in all pitches. In NLQ I have seen worse results from more recent and expensive

Panasonic KX-P1080 print demo

```
Draft Pica pitch - 10cpi
Draft Elite pitch - 12cpi
Compressed mode - 15cpi
Pica double width
Elite double width
Superscript characters

Subscript characters
Draft italic script
NLQ italic script
NLQ Pica pitch - normal spacing
NLQ Pica pitch - proportional spacing
NLQ Elite pitch
NLQ compressed
```

PC printers. Proportional spacing is supported in pica pitch but not in elite. The type styles include superscript, subscript and italic, although neither superscript nor subscript is available in NLQ. With the international and italic international character sets, there are nominally twelve print modes.

Of the ten international sets on the UK model, seven are switch selectable and three by software. (These figures will be different for more recent models, of course.) Apart from USA and UK, there are alternative dedicated characters for French, Danish (two sets), Swedish, Italian, Spanish, Japanese and Norwegian. Most of the international character sets are not very useful in printing in English, but do provide access to the pound, dollar and hash symbols, as well as some lesser-used ones. In all, there are 256 printable Ascii characters, from 0 to 255.

Still Quill

Despite recent updates in wordprocessing, I still use my Quill, enhanced by Athene Consultants' TurboQuill+, for nearly all my work.

Graphics output is good, with minimal 'streaking', even from the standard Easel GPRINT printer driver. I have also had impressive results from Page Designer 2 and

Omindump, which I use to demonstrate layouts when designing forms and publicity material for clients. User definable graphics are also supported, and there is a downloadable graphics mode. 8-pin and 9-pin bit-image graphics are available in standard, double and quadruple density.

The ribbon cartridge from the makers has a nominal three-million character life,

although this is reduced by heavy graphics use. There is also a supplementary ink reservoir, which can be activated by poking a pencil into a hole when the quality starts to fade. The ribbon is not re-inkable, and I would

not recommend any of the re-inkable substitutes. The print head does a good job of shredding ribbon seams with heavy use. The manufacturer's own ribbons are good, consistent, and readily available from Microsol Ltd.

On the down side, the KX-1080 does not support paper parking or scroll back, and will only accept 11 in or 12 in lengths. This can be irritating when using continuous stationery, not being A4. Also, when using continuous paper, the Centronics port is just below the paper path. The Miracle adaptor adds nearly three in to the back of the casing, and can cause the paper to drag. The tractor feed is not really suitable for NLQ output. However, the tractor sprockets can still be used in friction mode, and serve to keep the paper aligned on long print runs.

Only 1 KB of buffer memory is supplied, and this is not expandable, which means that a print spooler is useful to prevent Quill or Archive from being tied up during a long print session.

To sum up, the printer has been a good, reliable workhorse, requiring very little maintenance, and it is still well supported. There are more up to date and, by now, better-specified printers on the market, but for someone with a limited budget, a KX-P1080 is well worth considering.

In last month's instalment of this article, I ended by stating that the next task is to use the programming structure we had established, to keep track of where our document is as regards printer modes, and also to perform some simple automatic error corrections.

Modes and errors

For this section we must first have established the control codes for the various print modes. These are to a large extent random. (See the final section of the printer driver in figure one.)

We shall start our system by tracking the status of italics, bold, underline, proportional and superscript. It is very simple to switch the toggles on and off (lines 3100 to 3140). Once we have kept a track of which printer modes are in operation in this simple way, we have most of the background information necessary for detecting and correcting our various errors. We don't have to do any more than this for the time being, because the main error that can happen is that an end-toggle has been omitted and, since we cannot test for something non-existent, we must come back to this point only at the place where the close toggle should have been, ie at the end of a paragraph or line. Our trick will then be to check at those points if the relevant toggle status is on and, if so, either to have the program insert the close toggle at the end of the paragraph if we are sure that in every such case it is an error, or to generate a report so that we can decide ourselves whether it is an error or not. For example, we may want bold to span several paragraphs in certain situations, but usually we would have closed the bold toggle before a paragraph end. We shall come back to this operation in more detail.

Tackling toggles

However, with certain toggles, an error may have occurred simply by switching on or off, so it is here, when

we first encounter the toggles, that we must deal with any likely problems.

Our first probable error is that a change of density toggle occurs at the start of a paragraph. The sequence:

QThe start of a paragraph followed by the next lineQ

is wrong because the spaces at the start of the line before the Ctrl-Q are still in the old density, whereas the spaces at the start of the second line are in the new density. The result is printed like this:

The start of a paragraph followed by the next line

The programming solution (line 3170) is based on keeping track of the column number on the line (the variable "tab_posn", which is reset to zero each time an end of line is reached) and produce an error if the change of density occurs after the start of the line. But in that case, it will always be an error wherever the code appears, therefore we must allow for a change of density mid-way through a line without that being an error. Hence the extra condition that the error must occur before the first character on the line (kept by the array "info_array%"). You may, however, want the strict condition that an error is reported unless this type of printer code occurs at the very end of a line.

Pica toggle?

The same error is generated (lines 2920/2930) for the compressed toggle but not for the pica toggle because there is no such thing! Both the printer and this program default to pica. If, however, you always use elite (and start your document with the elite toggle) you will no doubt want to change this so that the same error is generated when the elite is switched off, rather than on (it will effectively become an on-pica toggle). The physical resolution of this type of error is to move the toggle to the blank line above or to the end of the previous text line.

Since we are devising a program structure that moves largely sequentially through the text, it is somewhat inappropriate to have the program correct this error, as it would involve going backwards through the file, inserting a character, then returning to the main file pointer position, an overly complex operation. Therefore we should simply generate an error and correct this manually afterwards. We shall deal with the error reporting separately. In any case, we should also manually check that the left margin is correct when changing density. If you want the left margin of elite text to line up exactly with a prior paragraph of pica, only the following settings will work:

Pica margin: 5 10 15 20
Elite margin: 6 12 18 24

and so on. Another error likely to occur is with enlarged density. Despite our perfect knowledge of our word processor and printer driver (!) we may forget that we will only be allowed half the number of enlarged characters on a line. We will need to check when we come to an 'off' toggle how long the line was; which means that, when we encounter an 'on' toggle we must also first have made a note of its position on the line. Let us call such a marker "enlstart"; when we reach a condition to set the toggle to on, we simply assign the value "tab_posn" (see above) to this variable (line 3230); upon arrival at the off toggle, we must decide how an error condition is to be generated. The characters up to the on toggle are not doubled, so the correct formula is of course:

characters up to on toggle plus twice length of enlarged text

A little algebra converts this to

$2(\text{tab_posn}) - \text{enlstart}$

(tab_posn being the position of the off toggle). We do not have to be precise about the length of line that this amount is not allowed to exceed, since we shall merely report an error

Perfect Paragraphs & Shining Characters Part 2

Martin Harris continues with his department course for properly proportioned printers.

and review manually afterwards, so let us take 80 as the limit. Thus we have the error condition:

```
IF (2(tab_posn) - enlstart) > 80 THEN report_error
```

Once the programming structure has been established, many other such situations can be relatively easily picked up and dealt with even for much more advanced printers than mine.

Hierarchy

We must still deal with the printer hierarchy, which promises to be slightly more complex.

The main problem that I encounter is that elite and proportional type are incompatible with compressed. I also like compressed to be double strike, so that it is not dotted, and this may create other incompatibilities.

We may deal with this on the basis that compressed is always compatible with pica and non-proportional, so if we ensure that whenever compressed is used, the printer status reverts to these, we shall overcome our problem. We shall call the elite status before the compressed toggle was encountered "precompel". Similarly for proportional, "precompppnl".

At the start of compressed type, the following operations are needed:

```
IF elite is on:
set precompel to 1,
otherwise 0
switch to off by inserting
Ctrl-Q into the text
```

```
IF ppnl is on:
set precompppnl to 1,
otherwise 0
switch to off by inserting
Ctrl-P into the text
```

At the end of compressed text we must:

```
IF precompel is 1:
insert ctrl Q to get back
elite
IF precompppnl is 1:
insert ctrl P to get back
ppnl.
```

We must also take care over

the order in which we make any insertions, to avoid the original problem recurring. (For the above operations, see lines 2920 to 3050.)

This does not overcome every hierarchy problem (for example, bold and NLQ are sometimes incompatible with other modes). Some such may occur very rarely, depending on your own preferences and needs. If in doubt over the printer manual's interpretation, experiment with some random text and various combinations of control codes, then add your own program lines accordingly.

Note that, depending on your preferences, some of these problems may be more simply countered by altering DIP switch settings on the printer itself. If you do this, remember that the converse problems will occur unless you absolutely never need these other combinations of print modes.

The last of the "simple" areas is that of our backspace-overprinted characters, which must not be used with ppnl (lines 2900/2910).

You have probably got the idea loud and clear by now: if ppnl is on and you need a backspace-overprinted character: insert an off-ppnl control code, print the character (to which the printer driver will add the backspace and overprinted accent), then insert an on-ppnl control code afterwards. A slight snag arises here in connection with other work being done by the program to do with proportional insertions.

For instance, consider this example of text:

P(i)Ê tre un aliné a:

̄The cat sat on the mat
All that glitters is either gold
or not.

Which will print like this:

(i) Être un aliné a:

The cat sat on the mat
All that glitters is either gold
or not.

[Note: in Martin's original example, the 'cat' rhyme is on the same line as the accented foreign words. The point is that the embedded codes offset the rhyme slightly to the right but, when they print, the 'cat' and 'gold' lines line up exactly on the left.]

We will get the computer to insert the Ctrl-Ps for us later in the article. Notice, however, that between two Ctrl-Ps, it would be wrong to insert further Ctrl-Ps. I monitor this situation as "status6". Similarly, compressed must be off before attempting this operation.

The main loop

Having impatiently gone ahead to look at some simple status keeping and error corrections, we should now return to the main structure, in which, as we have already mentioned, we must keep tabs on the line number (for error reporting) and the position of the character on the line, (for various purposes). We must also trap the end of line and end of paragraph points since it is here that we have decided that most of our end toggle errors will occur.

Do not worry about the line_analysis loop (lines 1750 to 2400) for the time being, as it is part of the proportional insert system which we shall discuss later. Our main loop therefore starts at line 2450.

The first thing is to set all our variables to zero before entering the loop (lines 2410 to 2440). The line number itself of course starts at 1, not 0. "number" and "count" (line 1720) are not set to zero but to the start of memory where they are or will be stored. These will be differently expressed if you are not using memory but disk, as explained earlier.

By the way, don't even think about using microdrives for these operations! They just won't stand the pace.

Some of the variables are for proportional inserts so forget

them for now - all will be revealed in due course.

Exotic names!

Without further ado, we start our loop. I chose the name "loop" because it sounded so exotic. Actually, you can assign any name to loops, procedures, variables, and so on, of whatever length without slowing your program down since, when it is compiled, these will all disappear and become mere numbers.

Inside the loop it is essential to set the conditions for exiting from the loop in the very first instance, and not at the end, (line 2470) otherwise the loop will cycle one time more than you want, which may have dangerous effects. The point of poking 10 (end of line) at the end is to overcome a bug that developed, whereby the last line of a document was never printed. I still don't know the cause but this is my solution. If anyone can shed light on the cause, please write to QL World. Any ideas?

Let us remind ourselves of our simple structural rules before continuing: each time round the loop we must increment the variables "number" and "count", the source and destination files respectively, and whenever an additional character is inserted into the document, "count" must be further incremented so that, when the process is finished, we know what section of memory to save to disk.

Buffer space

In this respect, note that the buffer for this purpose (line 1700) was set to 1.05 times the size of the source file, precisely to allow for further characters to be inserted. The program would still work without this, but it would be very risky, since it may be poking into areas of memory already used for something else. When checking the medium, this length was also assumed in order to check in advance whether there was enough space (line 1650).

We should also increment the position of the character on the line (lines 2570/2580)

but not for control characters since, when printed, they will take up no space, and additionally ensure that when an end-of-line is reached, the line position is reset to zero and the line number is incremented (lines 2670/2680).

To correct underline errors will be the next task. If an underline code occurs without being switched off before the end of a line, it may be an error or it may be that the final off switch is later in the same paragraph. In either case, a fresh underline must be inserted at the end of the line. We shall consider that if a manually inserted underline code is found before the end of the paragraph, no error is generated. In this case, we must get the computer to insert the underline characters at the end(s) of the line(s) and the beginning of the following line(s), until it reaches the manually inserted one. If however, it does not reach such a code by the end of the paragraph, it must both insert the extra code at the end, to avoid drastic misprints, and generate an error condition.

The program must therefore be in two parts: firstly, it must detect an end of line with underline status on and add the extra code. Secondly, it must insert a second code on the next line at the start of printed text (and not before).

Since we certainly do not need an underline code at the start of every line, we need some way of remembering whether the computer was in the middle of correcting an underline. We of course do this at the end of the line when we add the extra code. To summarise our logic:

At the end of a line: if underline status is on, add an off toggle and remember that we had done this (lines 2720/2730).

At the start of a line: at the first printable character, check our underline correction "remember" status (line 2590) and if it is on, add an extra underline toggle.

There are lots of things that our program has to "remember" in this way, and I have simply called them "status". In the case we are dealing with now, I called it "status7". I could have called it "in_the_middle_of_an_underline_correction" but opted for something a little shorter.

Reset to zero

When such a condition is met at the start of a line, the variable "status7" must be reset to zero before the next character on the line is examined, and the underline status itself must be changed in case the program loop discovers on its travels a manually inserted off-toggle. Finally, end of paragraph matters can be detected and dealt with simply by looking for an end of line (SElect on n1 = 10) followed immediately by another end of line (IF PEEK(number+1) = 10). If this situation is encountered while status7 = 1, then an error must be generated (line 2740). Also, status7 is reset to 0 because the computer has now physically dealt with the error so we are back to a normal situation.

The remaining end-of-paragraph type code errors are all dealt with in a similar way, except that nothing is actually corrected; only error reporting is performed. This could be a double-edged sword: if you switch the actual status off, without physically adding the end toggle, error reporting can continue correctly since, when the next paragraph to start with a toggle occurs, the program will think it is a start toggle and report an error if that paragraph does not contain a second toggle, and so on correctly, whereas had the toggle status been left as it was in reality, the program would think the next toggle was an end toggle such that a missing toggle later would not be reported and the main purpose of our program, to

report errors, would have been defeated. (If that's perfectly clear.)

Checks stymied

However, the rub is that if the status is altered from what it really is, no further hierarchy checks can be valid, which is especially upsetting if the actual end-toggle occurs deliberately later in the document.

For this reason, error detection statuses must be separated from the actual statuses, if the program is not to physically correct the error.

Hence distinct statuses (eg italerstat) are used, both to detect missing end toggles at end of line or paragraph (line 2770) and at the point where the real toggle status is updated (line 3100) and thus the real status and the theoretical error status are kept independant from each other.

In this way, when an end-toggle is detected as missing at the end of a line or paragraph, the next toggle to occur on its own in a paragraph will generate a second and corresponding error, and no action need be taken if that was what the user intended. If however the number of such errors is not an exact multiple of two, then a real error must have occurred. This situation can and should also be reported.

It is a matter of choice what to physically correct and what to merely report. I chose only to correct underline, in order to allow other print types run over several paragraphs. The computer will then report errors, but not correct them, leaving me to make the choice. As a matter of detail,

you can see that I wanted superscript to generate an error if the off-toggle was not encountered by the end of the line rather than end of paragraph (line 2710). Furthermore, enlarged mode must be switched off at the end of a line as instructed by the printer manual (line 2700).

You now have examples of all the printer type errors I can think of, and a structure which renders further types of error-checking and physical correction particular to your printer easy to add. You might care to extend the hierarchy checks if you are in the habit of switching between densities, etc.. often, perhaps to add more generalised line length error reports or even page length errors if you use different spacing and want to ensure that you have neither large blanks at the end of a page, nor accidentally run over.

One can dream

I also thought, perhaps over-ambitiously, of a fully-fledged interactive micro-justification system that would work by counting the exact number of pixels on a line, working out optimum line width, and replacing space characters by graphics spaces of varying widths. Of course, the program would have to be fed information on all the densities available to each printer, whether italics, proportional, bold, elite, pica, condensed, NLQ, draft, etc. The printer would then work more slowly, but nowhere near as slow as it would in full graphics mode. So far, there has not been a printer driver which allows enough information-bytes per "translate": to send a quad density graphics character to the printer takes nearly 30 bytes, while *Editor's* printer driver only allows 16. *Perfection Special Edition* does seem to overcome this, so I might give it a whirl one day.

In next month's instalment, I will move on to choosing the types of errors which are best reported by the program, and whether to correct by hand or via the program.

LOVELY JOKER

**Henry Orlowski
relaxes (alone)
with the Joker**

INFORMATION
Program: The
Lonely Joker
Supplier: Jochen
Merz Software,
Im Stillen Winkel
12, 4100
Duisberg 11,
Germany.
Price: £13.00

IMagine that it's time to relax and kill a few moments. You want something to do, but it has to be enjoyable and not taxing. The last thing you want is a dose of heavy concentration. Well, here's something you will want - designed specially with you in mind.

The Lonely Joker is an excellent representation of the classic patience or Solitaire card games featuring brilliant graphics and fine gameplay. The Lonely Joker will let you play at your own speed, with no pressure, and will lull you into a true sense of calmness, satisfaction and even achievement.

There are no opponents to beat, hard thinking is unnecessary, and you have all the time in the world to make your move. Ease of use is superb, too, especially if you have a Qimi+ mouse, as

the program runs under the Pointer Environment, although it is perfectly feasible to use the keyboard.

Suspense!

But don't get the impression that it lacks excitement. You can be progressing well, with cards present in the right place at the right time, when suddenly you reach an impasse. There seem to be no suitable cards in the deck. You think you're stuck. And then it all clicks into place. You move a sequence from one rank to another. That makes way for a card from the deck, and suddenly you're back in business. You go on to a rip-roaring finish. That's where the sense of achievement comes in.

Four games

You have a choice of three games (or four if you count the two versions of Echelon).

Echelon requires you to build four consecutively-numbered suit foundations either directly from the deck, or via a series of ranks which you build up with consecutive numbers but alternating colours. The program defaults to this game, although you can configure it to start off with any one you want.

The next game is *Napoleon*, and is linked to the great emperor and strategist himself. The object of the

game is similar to that of *Echelon*, but with a totally different layout and the facility to place cards in a temporary store in an effort to make way for more strategically-important cards. A number of other restrictions make this one of the hardest of the games to finish.


Cascade is different again. Here you are required to place cards in an ascending and/or descending order (this can alternate) regardless of suit. The skill needed is the ability to choose the order based on the availability of cards and possibility of finishing.

Delegation

It sounds easy, but it's not. While it's not hard work, you do need just the right amount of skill and strategic thinking. But, with foresight to cater for the lazy among you, if the program thinks it can finish the game for you, it will ask you if you want it to do so.

Other nice touches include an option to note the time taken to finish a game, and a choice of green (the default) or black boards. For the more enterprising among you, it's even possible to make the game more difficult by imposing a restriction on the number of card turns permitted.

I thoroughly recommend this software, and it comes at a very reasonable price.

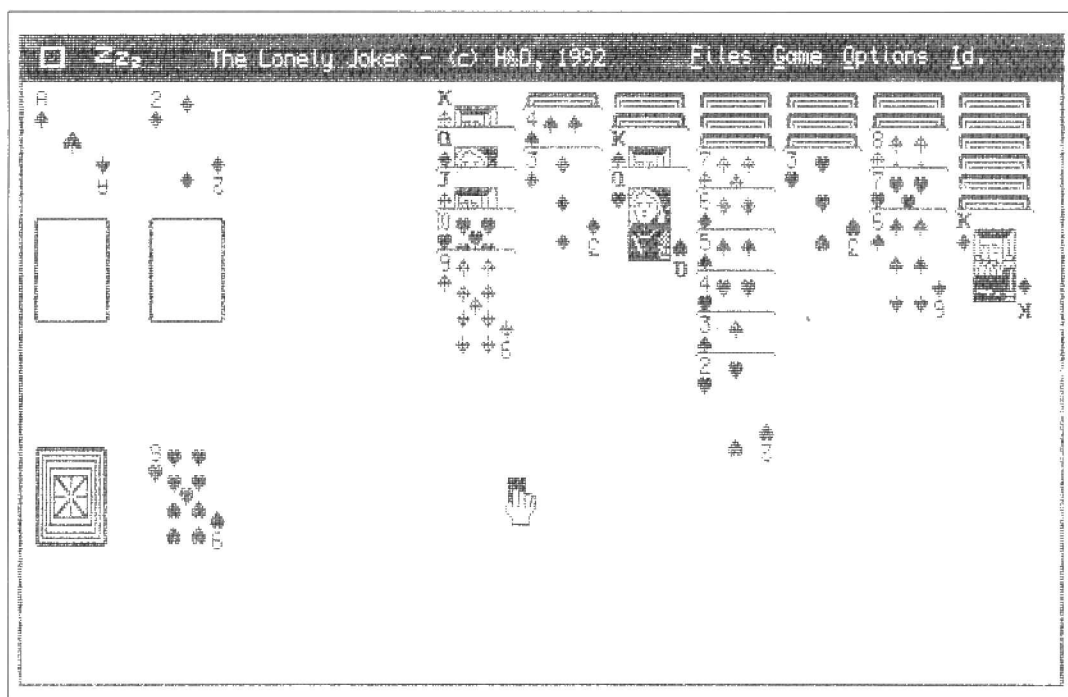

Eidersoft Ice rom

(windows,icons,pointers)front end ,choice multitasking & mailmerge m'drive cartridge,plus 128k RAM extension in TECHNOLOGY RESEARCH Delta discdrive/printer interface. All manuals and documentation included.Complete package £60. Telephone 0732 355341

PC Conqueror original

£65 QL computer vers JM £60 super toolkit 2 EPROM cartridge £18 Centronics printer interface £18 Philips green Hi-res monitor BM7502 £70.Telephone 0233 626713 (Kent)

QL £50 green monitor

£30, real time digitizer £50,Twin disk drive £50, software:digital S.E. £25, editor S.E. £25,touch typist £6,assembler £12.Telephone 021449 8041

Unused Penman plotter

suitable for use with QL,PC,BBC and RM computers. Up to A2 size. Bargain at only £120. Tel:0449 767130

QL 640k twin 3-1/2"

drives, mouse, minerva, cased seperate keyboard £150. Tonto with monitor £100. Qram,painter,eye Q, CPM emulator, sprite generator,MDVS,games,books .mags. Tel: Jeff 0908 233008

QL Minerva Rom,Trump

Card 3-1/2" D/D,Miracle centronics (x2) Tandata modem,serial printer, 6 years QLWorld, Quanta mags, books, software, b/w television extra MDV. Sensible offers please. Tel: 0977 515428

QL.JM Trump card 512k

TR.128k interface books, programs £60 Tel: 081 998 8018

640k JS QL twin 3-1/2"

drives housed printer, monitor, schon keyboard, Tandata modem, eidersoft mouse. V2.35 Psion suite turbo Quill taskmaster spellbound speedscreen £220 ono. buyer collects. Tel: 0765 640331

QL unexpanded AH

version PSU Psion software manual etc. Any offers Miracle Systems QL modem £20. Phone: John 0689 855444

JS QL, Metal case, PC

keyboard and l/face, twin 3-1/2" d/drives and OPD m/drives, some software. new colour monitor £250 ono. Also Tandata modem 3, CQVI Digitiser and more. Tel: (Derby) 0332 677746

Dual disk drive £75

toolkit III £15 success £25 superforth £25 Digital C £20 Qload £10 QLiberator MDV £12. Better Basic £12. Gold card £200 HD/DD drive £100. Phone: Paul 0795 535928

Professional poolster REVOLUTIONARY NEW SYSTEM

COMBINES

Sound logic with A.I. to win £ hundreds £
Analysis of Bookies Factors for matches
Common sense improves chances of Mega-Win
UNIQUE ENTRY SYSTEM

Takes only a few minutes each week

Over 300 teams in data-bank.

Minor league teams automatically added.

Prior to PC release @ £99.00

To QL users offered at SPECIAL PRICE £49

THIS MONTH

MONEY BACK GUARANTEE - Make a profit in your first full season or your money back.

256K ROM minimum. Discs Only. State 3.5 or 5.25

CHEQUE OR P.O. TO S.CANTON, OCEAN COMPUTER SERVICES, PO
BOX 68, NORTH DO. Manchester M8 6NJ

Tel. 061 740 9002

Please send coupon to: Advertising Department Sinclair/QL World, The Blue Barn, Wootton, Woodstock, Oxon. OX7 1HA. Please place this Classified Advertisement in the next issue of Sinclair/QL world.

NAME

ADDRESS

DAYTIME TELEPHONE NO

I enclose a cheque/P.O. to the value of £17.65 (inc. VAT) for a lineage advertisement of no more than 30 words. Please make cheques payable to: Arcwind Ltd.

CLASSIFIED



Dilwyn Jones Computing

41 Bro Emrys, Tal-y-Bont,
Bangor, Gwynedd LL57 3YT U.K.
Tel: Bangor (0248) 354023

GRAPHICS

- THE PAINTER V4.04** £25.00
[F 512k] 100% machine code pointer driven art and graphics program, by PROGS of Belgium. Can be mouse controlled. Patterns, fills, size changes, screen dumps, all sorts of facilities.
- THE CLIPART** £12.00
[F 128k] 3 disks packed full of screen pictures for use in desktop publishing and graphics programs. Ideal for use with The Painter or Image Processor or Page Designer, for example!
- PICTORIAL INDEX FOR THE CLIPART** £4.00
New printed index for the clipart with screen dumps of all pictures for easy selection.
- QRACTAL** £20.00
[F 512k] Machine code fractals program, able to display Julia or Mandelbrot sets.
- QRACTAL.SCREENS** £5.00
[F 128k] Sample screen pictures made with QRACTAL.
- IMAGE PROCESSOR 2** £15.00
[F 128k] Picture editing and creation system, image enhancement, mode conversion, touch up pictures from other sources. Can be used to tidy up screens from digitisers, for example, or just as an art and graphics program.
- PD2 CLIPART** £10.00
[F 128k] Clipart from Page Designer 2, supplied in mode 4 screens format for use with any graphics program.
- SCREEN SNATCHER** £10.00
[F M 128k] Grab screen displays from within other programs for use in your own programs!
- TEXT 'N' GRAPHIX** £20.00
[F 256k] Print text files containing screen dumps, mix text and graphics in same document.
- TRANS24** £10.00
[F M 128k] Translate 9 pin graphics output from most programs without a 24 pin printer driver to 24 pin.

TEXT

- QTYPE 2** £29.95
[F 512k] Typing and spelling checker, which uses pointer environment, 40,000 word English dictionary plus French and German dictionaries. Dictionary editor included to add your own words. SuperBASIC interface allows you to write your own BASIC programs which use QTYPE.
- BIBLE TEXT DISKS, PLAIN TEXT FORMAT** £20.00
BIBLE TEXT DISKS, QUILL FILE FORMAT £20.00
[F 512k] Text of the King James Bible on disks.
- SPELLBOUND** £30.00
[F M 384k] Spelling checker which checks your typing as you type! 30,000 word dictionary, expandable.
- SPELLBOUND SPECIAL EDITION** £50.00
[F 512k] Improved version with larger 50,000 word dictionary (expandable). Check spelling as you type or check existing text files.
- UPGRADE TO SPECIAL EDITION** £30.00
Please return master disk/cartridge when upgrading.
- QUICK POSTERS** £10.00
[F M 128k] Text poster maker for use with Star LC, NL and XB printers. Current version works in pointer environment, upgrade from old version £3.00

DATABASES

- ADDRESS BOOK & LABEL PRINTER** £15.00
[F M R 384k] Store names and addresses and print them out on a variety of label sizes, print telephone lists, etc.
- DATA DESIGN** £50.00
[F 512k] A database which can be programmed from BASIC or machine code. Runs in pointer environment which is supplied with the program. Fast and versatile.
- FLASHBACK** £25.00
[F M 256k] Fast database written in machine code, not programmable.
- FLASHBACK SPECIAL EDITION** £40.00
[F 256k] Enhanced version of Flashback, with Report Generator, etc. NB Please advise if to be used on a Gold Card, since Reporter Generator requires modification.
- QL GENEALOGIST SECOND EDITION** £30.00
[F 384k] Family trees and family history program, one of our best selling programs!
- UPGRADE TO SECOND EDITION** £12.00
Please return master disk with upgrade order.
- BUDGET 128K GENEALOGIST** £12.00
[F M 128k] A cut down version for unexpanded machines, still superb value for money.
- DISK INDEXER** £12.00
[F M 128k] Make a database of the contents of your disks, so that you can search for files, list them, and generally tidy up your disks and cartridges!
- DBEASY** £15.00
[F 512k] Database front end for Archive and a suite of programs called Chaos Busters!
- DBPROGS** £15.00
[F 512k] A collection of Archive utilities and text files to help you to learn to program Archive.

D.T.P.

- PAGE DESIGNER 2 PLUS** £40.00
[F 512k] QL Desktop publishing program, mix text and graphics, print pages, use graphics from other programs. Prints on most printers. Ask for information. Sadly, it has been badly delayed, so you should check with DJC first to see if available yet before ordering.
- UPGRADE TO PD2 PLUS** £20.00
Send proof of purchase of old Page Designer 2 with upgrade order. See note above re. delays.

QL HARDWARE

- MINI PROCESS CONTROLLER** £59.95
Relay switched outputs, controlled via QL serial ports.
- SOFTWARE TOOLKIT FOR MPC** £9.95
[F 128k] BASIC extensions to simplify writing programs to control the MPC.
- NETWORK PROVER** £3.50
A small box which plugs between networked QLs to give a visual indication of transmission over the network.
- QPOWER REGULATOR** £24.95

OTHER QL SOFTWARE

- QPAC1** £19.95
[F 512k] Pointer environment utilities, including calculator, calendar, alarm, typewriter, clock and system monitor utility. Pointer environment included. Quality QL software by Tony Tebby.
- QPAC2** £39.95
[F 512k] If you want to make full use of multitasking on your QL, this package is a must. Files maintenance menu, hotkeys, "things", channels, pick, etc. Extensive documentation and a tutorial is supplied. Another Tony Tebby package.
- QTOP** £29.50
[F 256k TK2] User front end for QDOS by Cowo Electronic of Switzerland. Desktop system, file handling, job control, program startup menus, with 5 desktop accessory programs.
- PRINTERMASTER** £20.00
[F M 128k] Printer control utility - select fonts, set margins, page length and much more. Printmaster puts you in control of your printer. Not a graphics program, not a printer driver creator, just a database of printer functions with the ability to send control codes to the printer quickly and easily without having to reach for your manual. Files for several makes of printers supplied, or create your own or modify those supplied quickly and easily. In constant use at DJC, that's what I think of it!
- HOME BUDGET** £20.00
[F M 128k] Domestic bills and accounts program.
- REMIND-ME** £12.00
[F M 128k] Dates reminder program. Quick and easy to use.
- REMIND-ME PLUS** £20.00
[F M 128k] Enhanced to allow more dates to be scheduled, longer event descriptions.
- SCREEN ECONOMISER** £10.00
[F M 128k] Turns off the QL display after a set number of minutes during which QL has not been used to protect the screen.
- SLOWGOLD** £5.00
[F 128k] Slowdown routine and control panel for software which runs too fast on a Gold Card or indeed on any QL system.
- TASKMASTER** £25.00
[F M 384k] Task switching utility. Enables you to conveniently switch between several programs in memory. Calculator, notepad and file handling utility included. Ideal if you want a simple to use system to let you have several programs in the computer at once and to switch between them at the press of a couple of keys. Can even save and restore the display of each program automatically.
- DISK LABELLER** £10.00
[F 256k] Prints neat labels for your floppy disks, listing the filenames from the disk in columns in small print on the label. Essential starting point to tidying up your disk collection. We have sold a great deal of copies of this useful little program - have you got yours yet?
- THE CAT** £5.00
[F M 128k] List filenames from a disk or cartridge in columns to the screen or printer. The list can be sorted if required. Useful and convenient utility. Installs as a BASIC extension then just type CAT for a list of files.

THE SMALL PRINT! POSTAGE AND PACKING CHARGES: Software is sent post-free to UK addresses. To other countries, please add £1.00 per program for postage and packing (sent by airmail where possible). PRICES: All prices are shown in UK Pounds Sterling. PAYMENT: We can accept payment by cheque (in UK Pounds Sterling currency only, please) drawn on UK branch of a bank or building society, by Eurocheque with card number written on the back, Postal Order, or by these credit cards: VISA, ACCESS, MASTERCARD, EUROCARD or by CONNECT card. Please state the card type, number, expiry date, your address, and sign orders sent by post. We can also accept orders paid by credit card over the telephone. There is an answering machine for when I am unable to answer in person so that I can call you back later. Goods remain the property of DJC until paid for in full. PLEASE STATE IF YOU REQUIRE SOFTWARE ON 3.5 OR 5.25 INCH DISKS OR MICRODRIVE CARTRIDGE.